



Shenzhen Yaxunda LCD Display Equipment Co., Ltd

Model: YXD32L-10

Version number:

Quotation (RMB)

prototype:

50PCS:

100PCS:

Date

Note: this quotation includes tax but not freight. The warranty is one year

32 Inch Wall Mounted Ultra-Narrow Display




Product pictures




Product size

725*415*60 l * w * t (mm)

Application Pictures

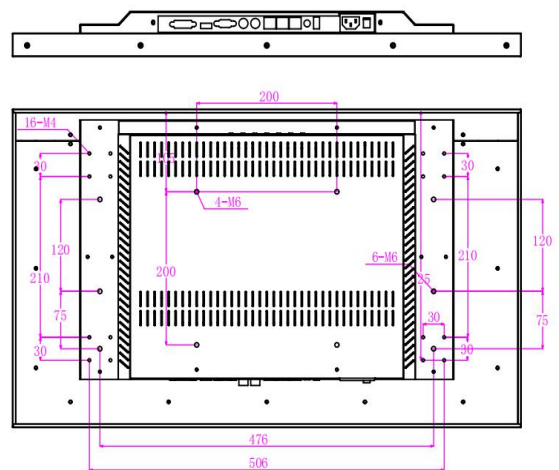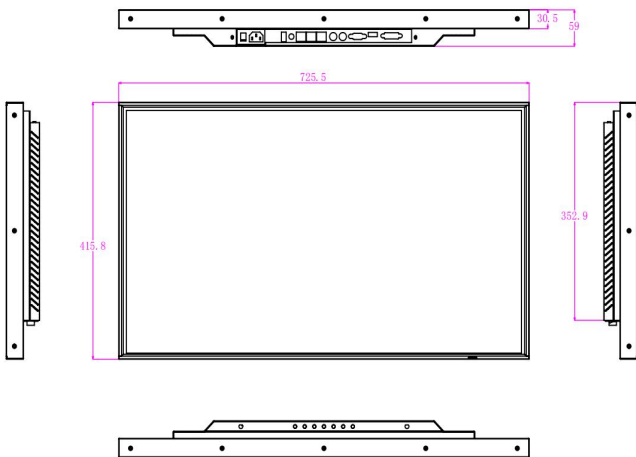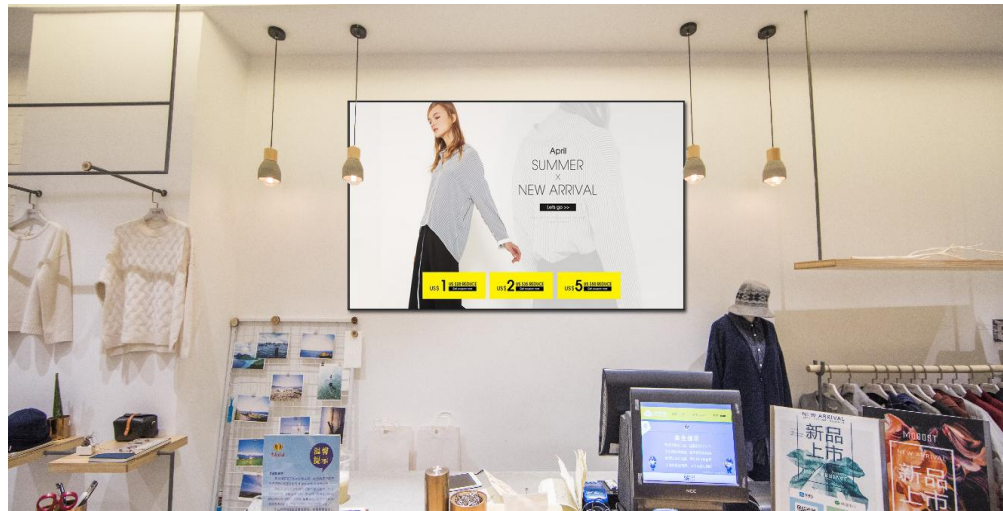

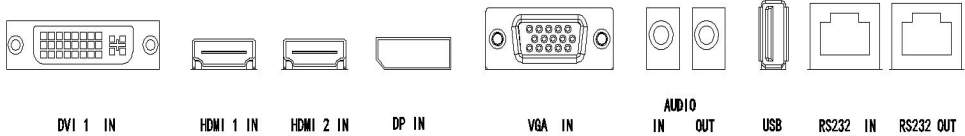Product description	Support 4K input, point 4 pcs 1920 splicing screen 3840x2160, you can achieve peer-to-peer display, display screen without compression stretch, display more clear and realistic; Input Signal Support 90 degrees, 180 degrees, 270 degrees rollover, excellent rollover effect. Support Soft Machine Code Setting (address code) , the board can set the row and column address by software dialing, do not need to worry about the calculation of Binary; automatic signal detection function, when detected signal input, will automatically switch to the signal source. Support Open all the way signal window (signal can support up to 4K) for full screen roaming, overlay	
	Specification parameter	
Panel	LCD: 32 inch TFT screen Screen scale: 16:9 Resolution: 1920 * 1080 Display area: 698 × 392 Dot pitch: 0.12 * 0.36 Contrast: 5000:1 Brightness: 500cd / m2 Response time: 8ms Visual angle: horizontal / vertical: 178 Backlight: LED backlight	
Control Board	MOTHERBOARD: SBL908C SYSTEM: Android / Windows Optional	
Interface	 DVI 1 IN HDMI 1 IN HDMI 2 IN DP IN VGA IN AUDIO IN OUT USB RS232 IN RS232 OUT	
Accessories	Manual, remote control, warranty card, certificate of conformity, power cord	
Material and Size	Product architecture	Iron Plate + Paint Process + Aluminium Alloy frame
	Installation mode	Horizontal Wall
	Protective glass	None
	weight	19.75kg
	Product size	725*415*60 (mm)
	Packing dimensions	845*545*260 (mm)
Working parameters	Brightness control	None
	temperature control	None
	Remote monitoring	None
	Remote monitoringWater proof requirement	None
	work environment	Operating temperature: 0 ° C to + 45 ° c operating humidity: 5% to 90%
	Power Supply	AC110~240V 60HZ
	power	80W