
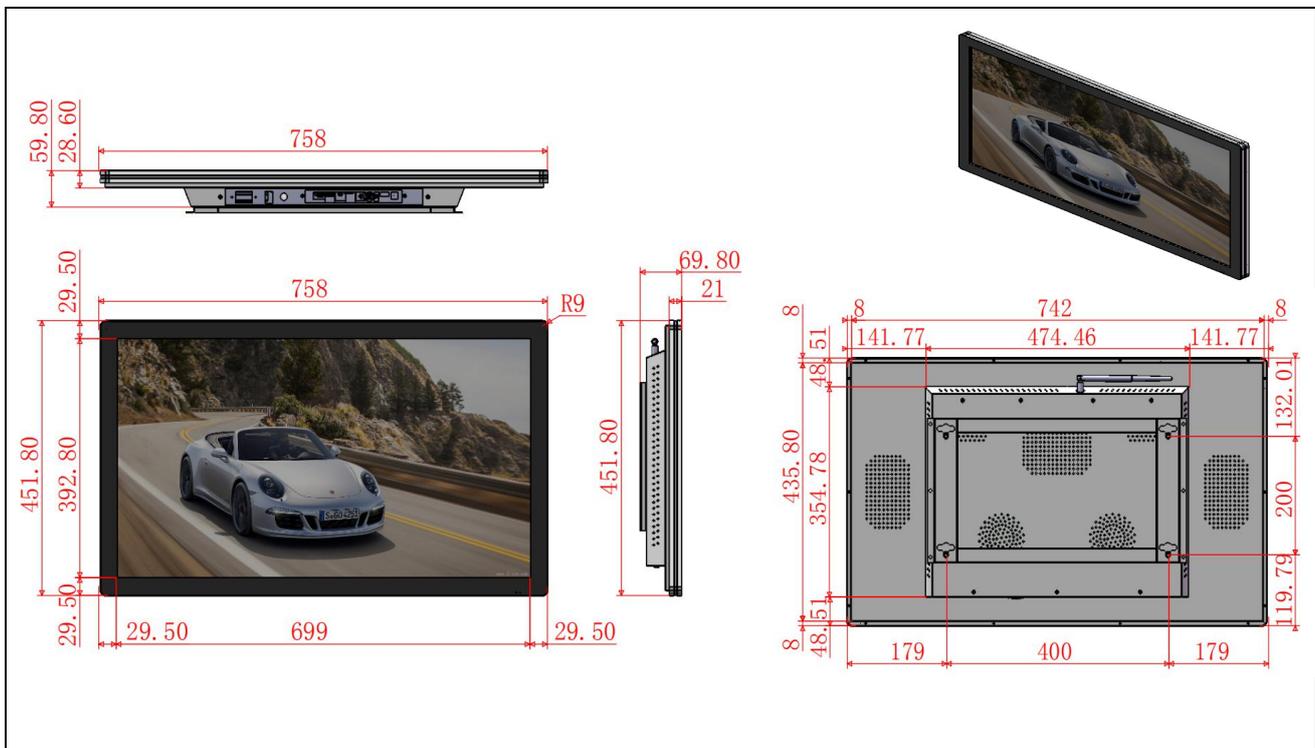

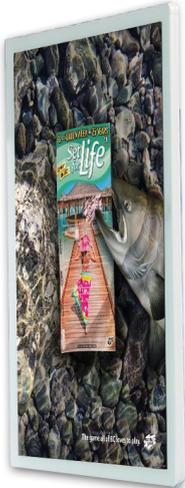



Asianda®	Shenzhen Yaxunda LCD Display Equipment Co., Ltd
Model No. : YXD32L	version no. : WA8
Quote (RMB)	prototype: 50pcs: 100pcs:
Date	Note: This offer is one year with tax and freight not included
32-inch wall mounted advertising machine	
Product Image	<div style="display: flex; justify-content: space-around; align-items: center;">   </div>
Product size	452*66*758 Wide * Thick * Long (mm)
Aplication Pictures	

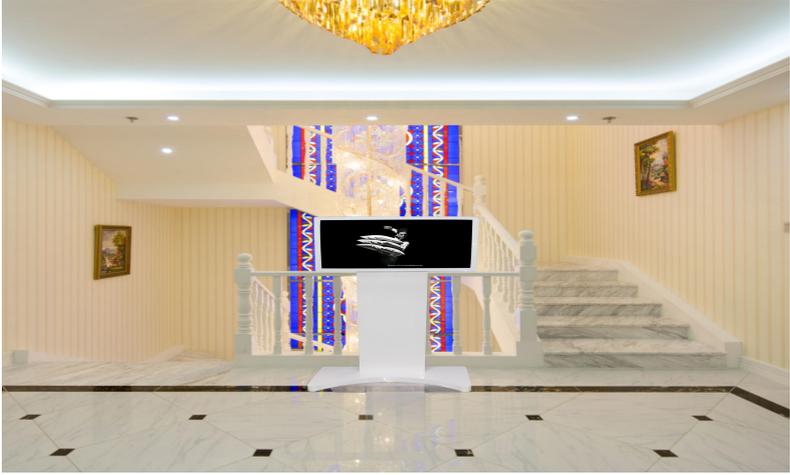


<p>Product characteristics</p>	<p>3d digital filter noise reduction, line-by-line scanning, the screen is true and delicate; Smart screen protection function, prevent Burns; Various high definition signal interface, strong compatibility; Intelligent backlight brightness control, improve the visual effect of image, save energy and save electricity; The intelligent temperature control cooling / heating system ensures the machine to work stably in the best environment.</p>
<p>Playback system</p>	<p>Each playing area can be arranged and layered freely, and can be played on horizontal and vertical screens; Screen Area Free Segmentation, composable picture, audio, video, web page, clock, date, caption, mixed material editing; Support Program and broadcast table preview, real-time monitoring playback screen, multi-stage timing switch settings, automatic reset; Different users can set different permissions; Adopt distributed management, support remote or local control; Support android phone or tablet terminal to play a list of programs, remote monitoring, timing switch function; Screen brightness can be adjusted automatically according to the surrounding environment; Supports a variety of general audio / Video, and office documents; Support cable, Wifi, 4G network.</p>
<p>Product name</p>	<p>Specification parameter</p>
<p>Display screen</p>	<p>LCD SCREEN: 32 Inch TFT Resolution: 1920 * 1080 Display Area: 698*392 contrast: 1400:1 brightness: 300 CDM2</p> <p>screen ratio: 16:9 Dots Distance: 0.12 * 0.36 response time: 8ms</p>
<p>Motherboard scheme</p>	<p>MOTHERBOARD: RK3288 quad-core, 2.0 Ghz Ram: 2 GB BUILT-IN STORAGE: EMMC 8G expandable 64G system: Android6.0 operating</p>

<p>Android interface</p>	 <p>POWER DC 12V AUDIO USB OTG USB TF/SIM RJ45 UBOOT</p>	
<p>Accessories</p>	<p>Manual, remote control, warranty card, certificate of conformity, Power Cord</p>	
<p>Product structure</p>	<p>Product architect</p>	<p>Hardware shell + lacquer process + aluminum alloy border</p>
	<p>Installation mode</p>	<p>Wall mounted type</p>
	<p>Protective Glass</p>	<p>4 mm tempered glass</p>
	<p>Weight</p>	<p>26kg</p>
	<p>Product size</p>	<p>452*66*758 (mm)</p>
	<p>Packing size</p>	<p>532*146*838 (mm)</p>
<p>Operating parameter</p>	<p>Brightness Control</p>	
	<p>Temperature</p>	
	<p>Working Environment</p>	<p>Working Temperature: 0 ° C to + 50 ° C working humidity: 5% to 90%</p>
	<p>Power supply</p>	<p>AC110~240V 60HZ</p>
	<p>Power</p>	<p>45W</p>

Asianda®	Shenzhen Yaxunda LCD Display Equipment Co., Ltd
Model No. : YXD32L	version no. : WA8
Quote (RMB)	prototype: 50pcs: 100pcs:
Date	Note: This offer is one year with tax and freight not included
32-inch Wall Mounted Advertising machine-capacitive touch	
Product Image	<div style="display: flex; justify-content: space-around; align-items: center;">   </div>
Product size	452*66*758 Wide * Thick * Long (mm)
Application Pictures	

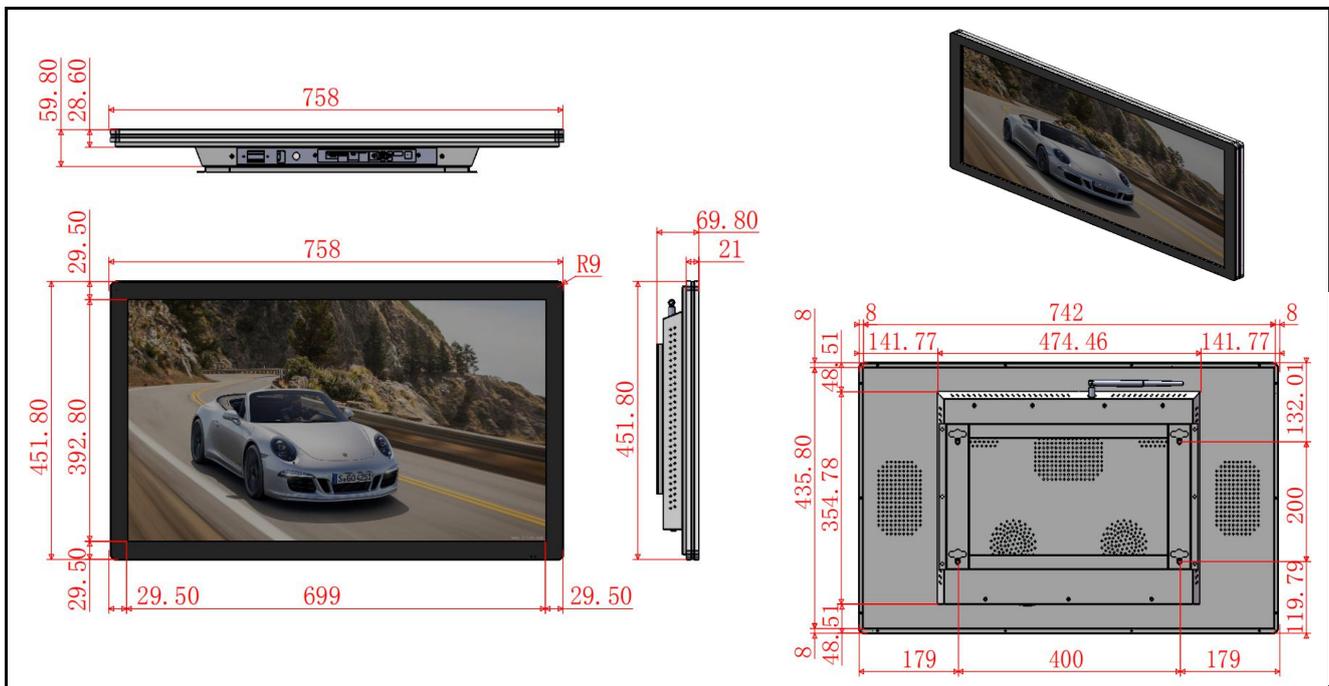

<p>Product characteristics</p>	<p>3d digital filter noise reduction, line-by-line scanning, the screen is true and delicate; Smart screen protection function, prevent Burns; Various high definition signal interface, strong compatibility; Intelligent backlight brightness control, improve the visual effect of image, save energy and save electricity; The intelligent temperature control cooling / heating system ensures the machine to work stably in the best environment.</p>
<p>Playback system</p>	<p>Each playing area can be arranged and layered freely, and can be played on horizontal and vertical screens; Screen Area Free Segmentation, composable picture, audio, video, web page, clock, date, caption, mixed material editing; Support Program and broadcast table preview, real-time monitoring playback screen, multi-stage timing switch settings, automatic reset; Different users can set different permissions; Adopt distributed management, support remote or local control; Support android phone or tablet terminal to play a list of programs, remote monitoring, timing switch function; Screen brightness can be adjusted automatically according to the surrounding environment; Supports a variety of general audio / Video, and office documents; Support cable, Wifi, 4G network.</p>
<p>Product name</p>	<p>Specification parameter</p>
<p>Display screen</p>	<p>LCD SCREEN: 32 Inch TFT screen ratio: 16:9 Resolution: 1920 * 1080 Display Area: 698*392 Dots Distance: 0.12 * 0.36 contrast: 1400:1 brightness: 300 CDM2 response time: 8ms</p>
<p>Touch screen</p>	<p>10 points high precision, G+G touch screen Transmission rate is 90 , resolution: 4096 * 4096 Minimum Touch Body: Surround 3mm Response Speed: <lt; 10ms Surface hardness: Mohs 7 scan rate: 50 scans / S Operating temperature: 0 ° C ~ 50 ° C, Durability: withstand more than 600,000,000 10-point touches Operating system: Windows 7 \ XP \ 2003 \ Linux, MacOS</p>

Motherboard scheme	MOTHERBOARD: RK3288 quad-core, 2.0 Ghz Ram: 2 GB BUILT-IN STORAGE: EMMC 8G expandable 64G operating system: Android6.0	
Android interface		
Accessories	Manual, remote control, warranty card, certificate of conformity, Power Cord	
Product structure	Product architect	Hardware shell + lacquer process + aluminum alloy border
	Installation mode	Wall mounted type
	Protective Glass	4 mm tempered glass
	Weight	26kg
	Product size	452*66*758 (mm)
	Packing size	532*146*838 (mm)
Operating parameter	Brightness Control	
	Temperature	
	Working Environment	Working Temperature: 0 ° C to + 50 ° C working humidity: 5% to 90%
	Power supply	AC110~240V 60HZ
	Power	45W