
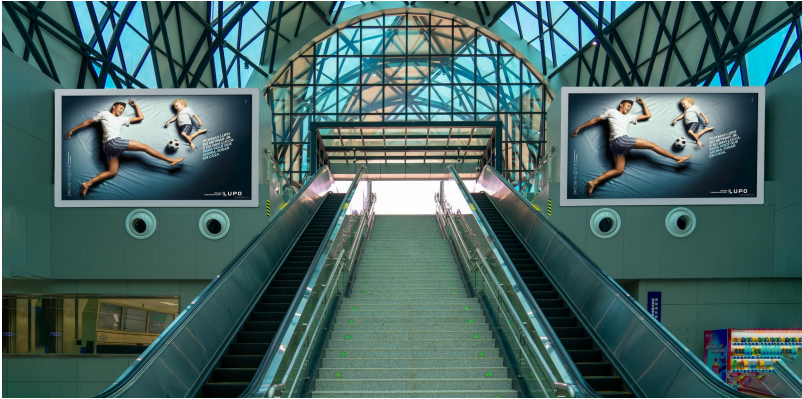
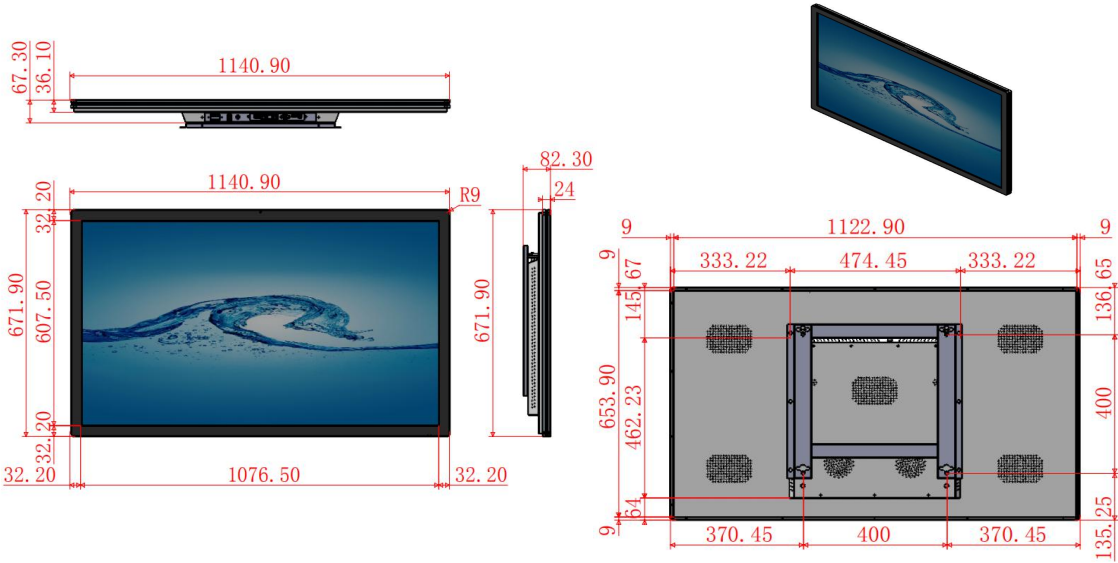

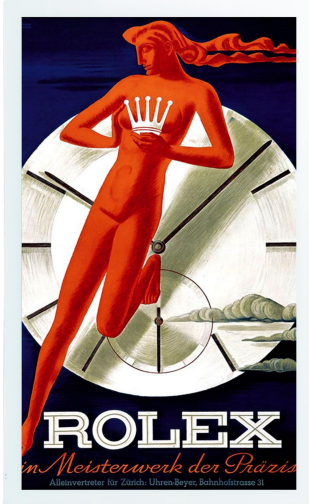

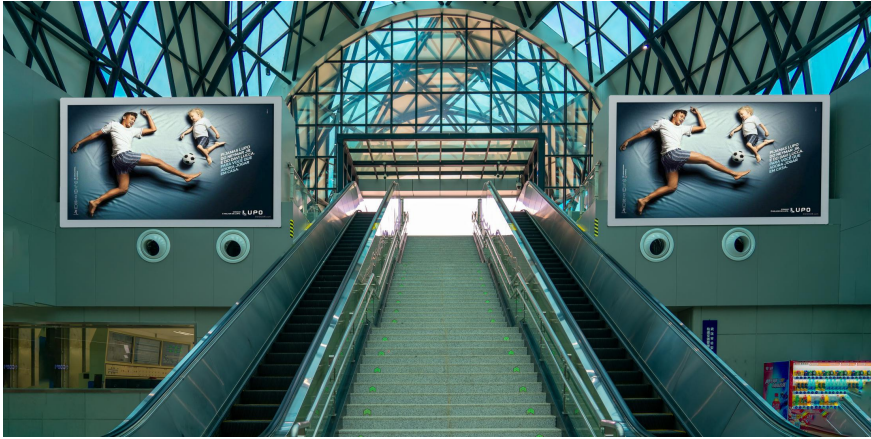
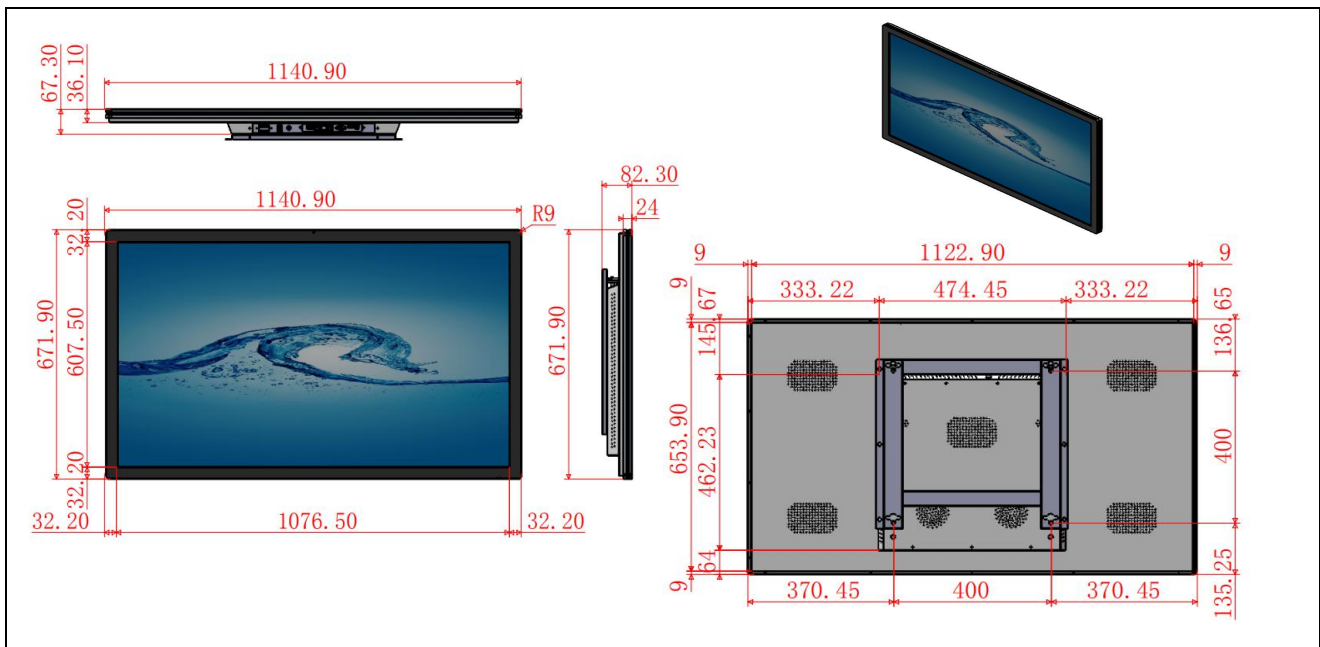



Asianda®	Shenzhen Yaxunda LCD Display Equipment Co., Ltd		
Model No. : YXD49L	version no. : WA8		
Quote (RMB)	样机:	50台:	100台:
Date	Note: This offer is one year with tax and freight not included		
49-inch wall mounted advertising machine			
Product Image			
Product size	672*73*1141 Wide * Thick * Long (mm)		
Aplication Pictures			
 <p>Technical drawing showing dimensions for the 49-inch wall-mounted advertising machine:</p> <ul style="list-style-type: none"> Top view: Total width 1140.90 mm, mounting depth 67.30 mm, bezel depth 36.10 mm. Front view: Total height 671.90 mm, bezel height 32.20 mm, screen height 607.50 mm, bottom bezel height 32.20 mm, total width 1076.50 mm, side bezel height 671.90 mm, top bezel height 32.20 mm, bottom bezel height 32.20 mm. Side view: Total thickness 82.30 mm, bezel thickness 24 mm, screen depth R9. Back view: Total width 1122.90 mm, total height 400 mm, mounting hole spacing 333.22 mm, central panel width 474.45 mm, central panel height 145.67 mm, mounting hole diameter 64 mm, mounting hole offset 370.45 mm, mounting hole diameter 136.65 mm, mounting hole offset 135.25 mm, mounting hole diameter 400 mm. 			

duct characteristic	<p>3d digital filter noise reduction, line-by-line scanning, the screen is true and delicate; Smart screen protection function, prevent Burns; Various high definition signal interface, strong compatibility; Intelligent backlight brightness control, improve the visual effect of image, save energy and save electricity; The intelligent temperature control cooling / heating system ensures the machine to work stably in the best environment.</p>							
Playback system	<p>Each playing area can be arranged and layered freely, and can be played on horizontal and vertical screens; Screen Area Free Segmentation, composable picture, audio, video, web page, clock, date, caption, mixed material editing; Support Program and broadcast table preview, real-time monitoring playback screen, multi-stage timing switch settings, automatic reset; Different users can set different permissions; Adopt distributed management, support remote or local control; Support android phone or tablet terminal to play a list of programs, remote monitoring, timing switch function; Screen brightness can be adjusted automatically according to the surrounding environment; Supports a variety of general audio / Video, and office documents;</p>							
Product name	Specification parameter							
Display screen	<table border="0" style="width: 100%;"> <tr> <td>LCD SCREEN: 49 Inch TFT 1080</td> <td style="text-align: center;">SCREEN SCALE: 16:9</td> <td style="text-align: right;">Resolution: 1920 * 1080</td> </tr> <tr> <td>Display Area: 1210 * 680 brightness: 450 CDM2 Vertical: 178</td> <td style="text-align: center;">Point Distance: 0.63 * 0.63 Response Time: 6ms</td> <td style="text-align: right;">contrast: 4000:1 Angle: Horizontal /</td> </tr> </table>		LCD SCREEN: 49 Inch TFT 1080	SCREEN SCALE: 16:9	Resolution: 1920 * 1080	Display Area: 1210 * 680 brightness: 450 CDM2 Vertical: 178	Point Distance: 0.63 * 0.63 Response Time: 6ms	contrast: 4000:1 Angle: Horizontal /
LCD SCREEN: 49 Inch TFT 1080	SCREEN SCALE: 16:9	Resolution: 1920 * 1080						
Display Area: 1210 * 680 brightness: 450 CDM2 Vertical: 178	Point Distance: 0.63 * 0.63 Response Time: 6ms	contrast: 4000:1 Angle: Horizontal /						
Motherboard scheme	<table border="0" style="width: 100%;"> <tr> <td>MOTHERBOARD: RK3288 quad-core, 2.0</td> <td style="text-align: right;">Ghz Ram: 2 GB</td> </tr> <tr> <td>BUILT-IN STORAGE: EMMC 8G expandable 64G</td> <td style="text-align: right;">operating system: Android6.0</td> </tr> </table>		MOTHERBOARD: RK3288 quad-core, 2.0	Ghz Ram: 2 GB	BUILT-IN STORAGE: EMMC 8G expandable 64G	operating system: Android6.0		
MOTHERBOARD: RK3288 quad-core, 2.0	Ghz Ram: 2 GB							
BUILT-IN STORAGE: EMMC 8G expandable 64G	operating system: Android6.0							
Android interface								
Accessories	Manual, remote control, warranty card, certificate of conformity, Power Cord							
Product structure	Product	Hardware shell + lacquer process + aluminum alloy border						
	Installat	Wall mounted type						
	Protectiv	4 mm tempered glass						
	Weight	40kg						
	Product	672*73*1141 (mm)						
	Packing	752*153*1221 (mm)						
Operating parameter	Brightness							
	Temperatu							
	Working	Working Temperature: 0 ° C to + 50 ° C working humidity: 5% to 90%						
	Power	AC110~240V 60HZ						
	Power	80W						

Asianda®	Shenzhen Yaxunda LCD Display Equipment Co., Ltd
Model No. : YXD49L	version no. : WA8
Quote (RMB)	prototype: 50pcs: 100pcs:
Date	Note: This offer is one year with tax and freight not included
49-inch Wall Mounted Advertising machine-capacitive touch	
Product Image	<div style="display: flex; justify-content: space-around; align-items: center;">   </div>
Product size	672*73*1141 Wide * Thick * Long (mm)
Application Pictures	



<p>Product characteristics</p>	<p>3d digital filter noise reduction, line-by-line scanning, the screen is true and delicate; Smart screen protection function, prevent Burns; Various high definition signal interface, strong compatibility; Intelligent backlight brightness control, improve the visual effect of image, save energy and save electricity; The intelligent temperature control cooling / heating system ensures the machine to work stably in the best environment.</p>
<p>Playback system</p>	<p>Each playing area can be arranged and layered freely, and can be played on horizontal and vertical screens; Screen Area Free Segmentation, composable picture, audio, video, web page, clock, date, caption, mixed material editing; Support Program and broadcast table preview, real-time monitoring playback screen, multi-stage timing switch settings, automatic reset; Different users can set different permissions; Adopt distributed management, support remote or local control; Support android phone or tablet terminal to play a list of programs, remote monitoring, timing switch function; Screen brightness can be adjusted automatically according to the surrounding environment; Supports a variety of general audio / Video, and office documents; Support cable, Wifi, 4G network.</p>
<p>Product name</p>	<p>Specification parameter</p>
<p>Display screen</p>	<p>LCD SCREEN: 49 Inch TFT Resolution: 1920 * 1080 Display Area: 1210 * 680 contrast: 4000:1 brightness: 450 CDM2</p> <p>SCREEN SCALE: 16:9 Point Distance: 0.63 * 0.63 Response Time: 6ms</p>
<p>Touch screen</p>	<p>10 points high precision, G+G touch screen Transmission rate is 90 , resolution: 4096 * 4096 Minimum Touch Body: Surround 3mm Response Speed: < 10ms Surface hardness: Mohs 7 scan rate: 50 scans / S Operating temperature: 0 ° C ~ 50 ° C, Durability: withstand more than 600,000,000 10-point touches Operating system: Windows 7 \ XP \ 2003 \ Linux, MacOS</p>
<p>Motherboard scheme</p>	<p>MOTHERBOARD: RK3288 quad-core, 2.0 Ghz Ram: 2 GB BUILT-IN STORAGE: EMMC 8G expandable 64G operating system: Android6.0</p>

Android interface		
Accessories	Manual, remote control, warranty card, certificate of conformity, Power Cord	
Product structure	Product architect	Hardware shell + lacquer process + aluminum alloy border
	Installation mode	Wall mounted type
	Protective Glass	4 mm tempered glass
	Weight	40kg
	Product size	672*73*1141 (mm)
	Packing size	752*153*1221 (mm)
Operating parameter	Brightness Control	
	Temperature	
	Working Environment	Working Temperature: 0 ° C to + 50 ° C working humidity: 5% to 90%
	Power supply	AC110~240V 60HZ
	Power	80W