
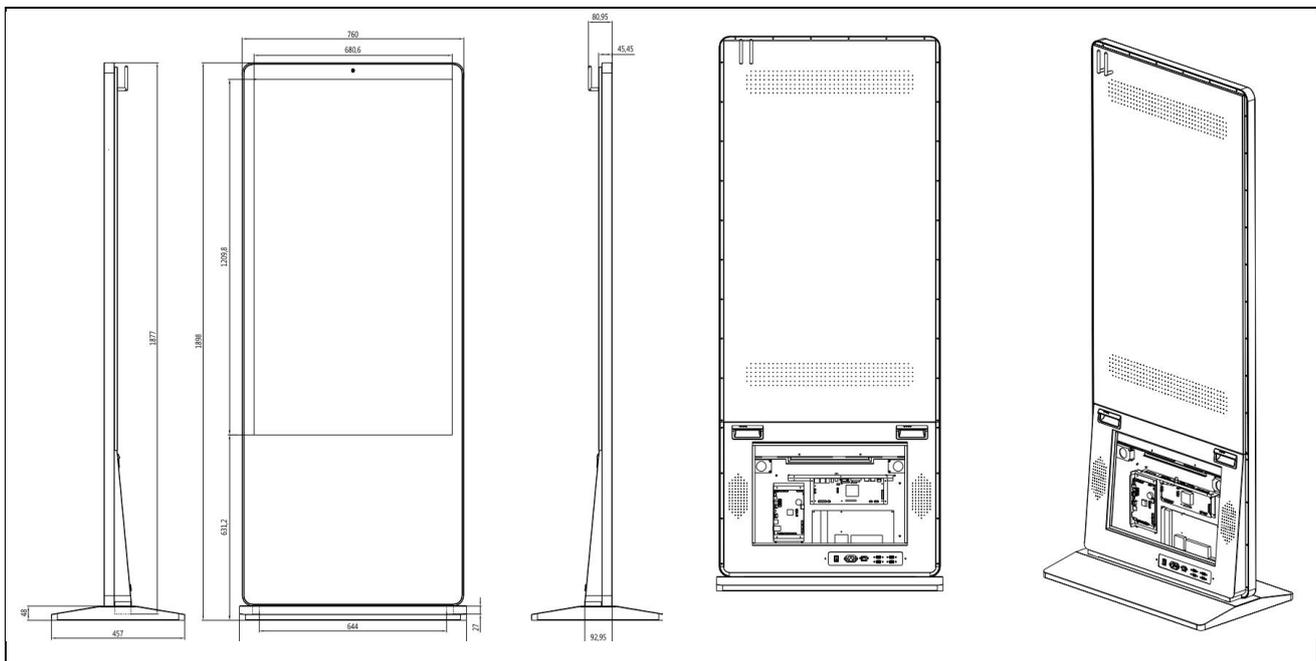


<b>Asianda®</b>	Shenzhen Yaxunda LCD Display Equipment Co., Ltd
Model no: YXD55P	version no: WA9
Quote (RMB)	PROTOTYPE::            50PCS:            100PCS:
Date	<b>Note: This offer is one year with tax and freight not included</b>
<b>55-inch floor-mounted advertising machine</b>	
Product Image	<div style="display: flex; justify-content: space-around; align-items: center;">   </div>
Product size	1898*45*760 h * t * w (mm)
Application Pictures	



<p><b>Product characteristics</b></p>	<p>3d digital filter noise reduction, line-by-line scanning, the screen is true and delicate;          Smart screen protection function, prevent Burns;          Various high definition signal interface, strong compatibility;          Intelligent backlight brightness control, improve the visual effect of image, save energy and save electricity;          The intelligent temperature control cooling / heating system ensures the machine to work stably in the best environment.</p>
<p><b>Playback system</b></p>	<p>Each playing area can be arranged and layered freely, and can be played on horizontal and vertical screens;          Screen Area Free Segmentation, composable picture, audio, video, web page, clock, date, caption, mixed material editing;          Support Program and broadcast table preview, real-time monitoring playback screen, multi-stage timing switch settings, automatic reset;          Different users can set different permissions;          Adopt distributed management, support remote or local control;          Support android phone or tablet terminal to play a list of programs, remote monitoring, timing switch function;          Screen brightness can be adjusted automatically according to the surrounding environment;          Supports a variety of general audio / Video, and office documents;          Support cable, Wifi, 4G network.</p>
<p><b>Product name</b></p>	<p><b>Specification parameter</b></p>
<p><b>Display screen</b></p>	<p>LCD: 55 Inch          Resolution: 1920 * 1080          Display Area: 1210 * 680          contrast: 4000:1          brightness: 450 CDM2          Angle: Horizontal / Vertical: 178</p> <p>TFT SCREEN RATIO: 16:9          Point Distance: 0.63 * 0.63          Response Time: 6ms</p>
<p><b>Motherboard scheme</b></p>	<p>MOTHERBOARD: RK3288 quad-core, 2.0 Ghz          Ram: 2 GB          BUILT-IN STORAGE: EMMC 8G expandable 64G</p> <p>operating system:</p>

<p><b>Android interface</b></p>	 <p>POWER    DC 12V    AUDIO    USB    OTG    USB    TF/SIM    RJ45    UBOOT</p>	
<p><b>Accessories</b></p>	<p>Manual, remote control, warranty card, certificate of conformity, Power Cord</p>	
<p><b>Product structure</b></p>	<p>Product architect</p>	<p>Hardware shell + lacquer process + aluminum alloy border</p>
	<p>Installation mode</p>	<p>Floor type</p>
	<p>Protective Glass</p>	<p>4 mm toughened glass</p>
	<p>Weight</p>	<p>71kg</p>
	<p>Product size</p>	<p>1898*45*760 (mm)</p>
	<p>Packing size</p>	<p>2000*210*870 (mm)</p>
<p><b>Operating parameter</b></p>	<p>Brightness Control</p>	
	<p>Temperature</p>	
	<p>Working Environment</p>	<p>Working Temperature: 0 ° C to + 50 ° C working humidity: 5% to 90%</p>
	<p>Power supply</p>	<p>AC110~240V</p>
	<p>Power</p>	<p>115W</p>