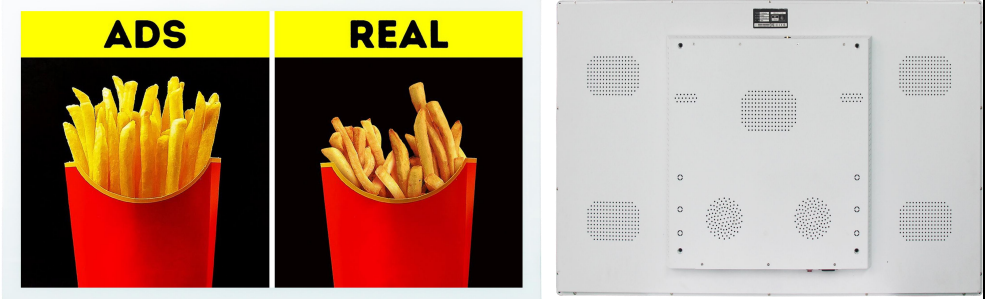

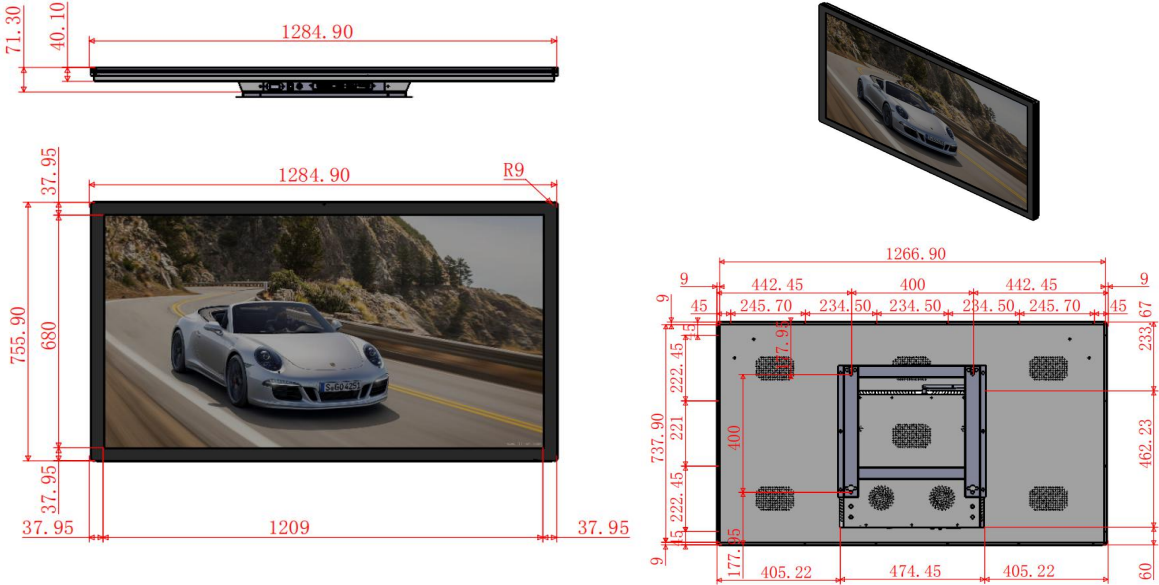

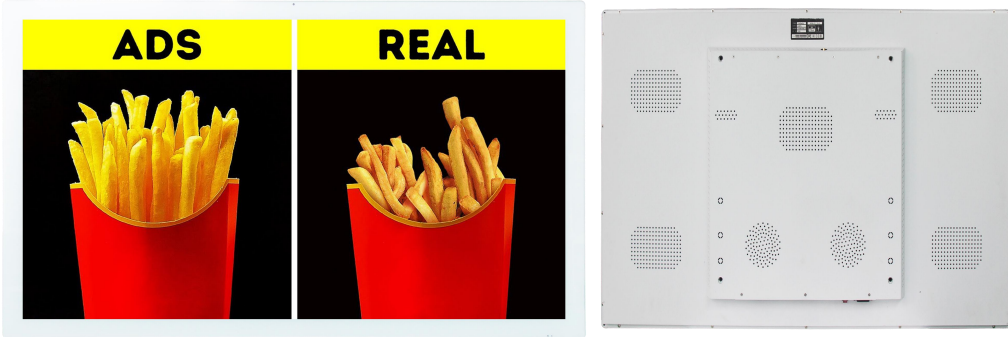
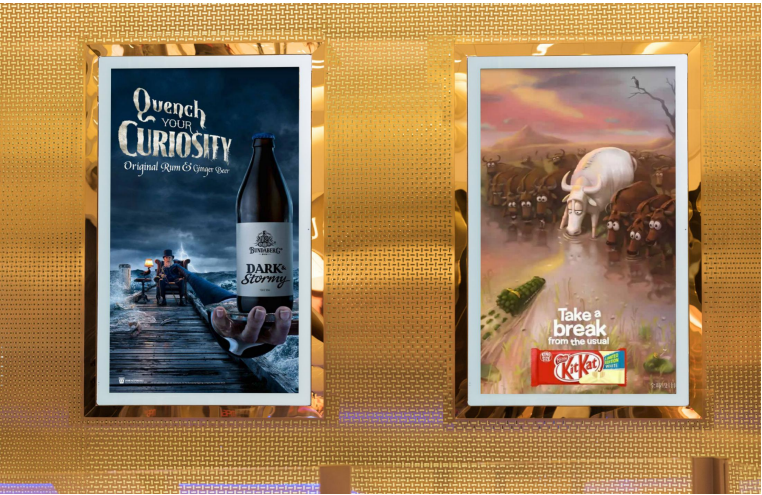
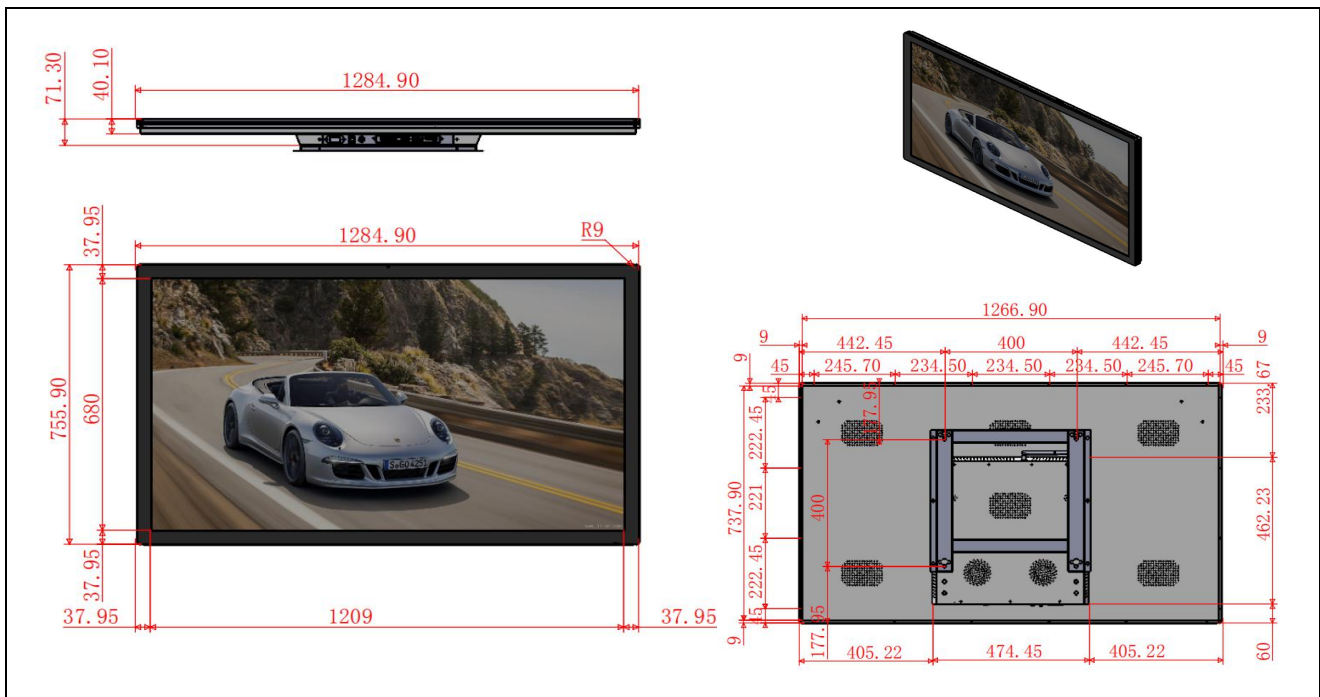



<p><b>Asianda®</b></p>	<p>Shenzhen Yaxunda LCD Display Equipment Co., Ltd</p>
<p>Model No. : YXD55L</p>	<p>version no. : WA8</p>
<p>Quote (RMB)</p>	<p>prototype:                    50pcs:                    100pcs:</p>
<p>Date</p>	<p>Note: This offer is one year with tax and freight not included</p>
<p>55-inch wall mounted advertising machine</p>	
<p>Product Image</p>	
<p>Product size</p>	<p>756*76*1285 Wide * Thick * Long (mm)</p>
<p>Application Pictures</p>	
	

<b>Product characteristics</b>	<p>3d digital filter noise reduction, line-by-line scanning, the screen is true and delicate;</p> <p>Smart screen protection function, prevent Burns;</p> <p>Various high definition signal interface, strong compatibility;</p> <p>Intelligent backlight brightness control, improve the visual effect of image, save energy and save electricity;</p> <p>The intelligent temperature control cooling / heating system ensures the machine to work stably in the best environment.</p>	
<b>Playback system</b>	<p>Each playing area can be arranged and layered freely, and can be played on horizontal and vertical screens;</p> <p>Screen Area Free Segmentation, composable picture, audio, video, web page, clock, date, caption, mixed material editing;</p> <p>Support Program and broadcast table preview, real-time monitoring playback screen, multi-stage timing switch settings, automatic reset;</p> <p>Different users can set different permissions;</p> <p>Adopt distributed management, support remote or local control;</p> <p>Support android phone or tablet terminal to play a list of programs, remote monitoring, timing switch function;</p> <p>Screen brightness can be adjusted automatically according to the surrounding environment;</p> <p>Supports a variety of general audio / Video, and office documents;</p> <p>Support cable, Wifi, 4G network.</p>	
<b>Product name</b>	<b>Specification parameter</b>	
<b>Display screen</b>	<p>LCD: 55 Inch TFT</p> <p>Resolution: 1920 * 1080</p> <p>Display Area: 1210 * 680</p> <p>contrast: 4000:1</p> <p>brightness: 450 CDM2</p>	<p>SCREEN RATIO: 16:9</p> <p>Point Distance: 0.63 * 0.63</p> <p>Response Time: 6ms</p>
<b>Motherboard scheme</b>	<p>MOTHERBOARD: RK3288 quad-core, 2.0</p> <p>BUILT-IN STORAGE: EMMC 8G expandable 64G</p> <p>Android6.0</p>	<p>Ghz Ram: 2 GB</p> <p>operating system:</p>
<b>Android interface</b>	 <p>POWER    DC 12V    AUDIO    USB    OTG    USB    TF/SIM    RJ45    UBOOT</p>	
<b>Accessories</b>	Manual, remote control, warranty card, certificate of conformity, Power Cord	
<b>Product structure</b>	Product architect	Hardware shell + lacquer process + aluminum alloy border
	Installation mode	Wall mounted type
	Protective Glass	4 mm tempered glass
	Weight	45kg
	Product size	756*76*1285 (mm)
	Packing size	836*156*1365 (mm)
<b>Operating parameter</b>	Brightness Control	
	Temperature	
	Working Environment	Working Temperature: 0 ° C to + 50 ° C working humidity: 5% to 90%
	Power supply	AC110~240V 60HZ
	Power	125W

<b>Asianda®</b>	Shenzhen Yaxunda LCD Display Equipment Co., Ltd
Model No. : YXD55L	version no. : WA8
Quote (RMB)	prototype:            50台:            100台:
Date	Note: This offer is one year with tax and freight not included
<b>55-inch Wall Mounted Advertising machine-capacitive touch</b>	
Product Image	
Product size	756*76*1285    Wide * Thick * Long (mm)
Application Pictures	



<p><b>Product characteristics</b></p>	<p>3d digital filter noise reduction, line-by-line scanning, the screen is true and delicate;          Smart screen protection function, prevent Burns;          Various high definition signal interface, strong compatibility;          Intelligent backlight brightness control, improve the visual effect of image, save energy and save electricity;          The intelligent temperature control cooling / heating system ensures the machine to work stably in the best environment.</p>
<p><b>Playback system</b></p>	<p>Each playing area can be arranged and layered freely, and can be played on horizontal and vertical screens;          Screen Area Free Segmentation, composable picture, audio, video, web page, clock, date, caption, mixed material editing;          Support Program and broadcast table preview, real-time monitoring playback screen, multi-stage timing switch settings, automatic reset;          Different users can set different permissions;          Adopt distributed management, support remote or local control;          Support android phone or tablet terminal to play a list of programs, remote monitoring, timing switch function;          Screen brightness can be adjusted automatically according to the surrounding environment;          Supports a variety of general audio / Video, and office documents;          Support cable, Wifi, 4G network.</p>
<p><b>Product name</b></p>	<p><b>Specification parameter</b></p>
<p><b>Display screen</b></p>	<p>LCD: 55 Inch TFT          Resolution: 1920 * 1080          Display Area: 1210 * 680          contrast: 4000:1          brightness: 450 CDM2</p> <p>SCREEN RATIO: 16:9          Point Distance: 0.63 * 0.63          Response Time: 6ms</p>
<p><b>Touch screen</b></p>	<p>10 points high precision, G+G touch screen          Transmission rate is 90 , resolution: 4096 * 4096          Minimum Touch Body: Surround 3mm Response Speed: &lt;lt; 10Ms          Surface hardness: Mohs 7 scan rate: 50 scans / S          Operating temperature: 0 ° C ~ 50 ° C,          Durability: withstand more than 600,000,000 10-point touches          Operating system: Windows 7 \ XP \ 2003 \ Linux, MacOS</p>

<b>Motherboard scheme</b>	MOTHERBOARD: RK3288 quad-core, 2.0 Ghz Ram: 2 GB BUILT-IN STORAGE: EMMC 8G expandable 64G operating system: Android6.0	
<b>Android interface</b>		
<b>Accessories</b>	Manual, remote control, warranty card, certificate of conformity, Power Cord	
<b>Product structure</b>	Product architect	Hardware shell + lacquer process + aluminum alloy border
	Installation mode	Wall mounted type
	Protective Glass	4 mm tempered glass
	Weight	45kg
	Product size	756*76*1285 (mm)
	Packing size	836*156*1365 (mm)
<b>Operating parameter</b>	Brightness Control	
	Temperature	
	Working Environment	Working Temperature: 0 ° C to + 50 ° C working humidity: 5% to 90%
	Power supply	AC110~240V 60HZ
	Power	125W