

**Asianda®**

Shenzhen Yaxunda LCD Display Equipment Co., Ltd

Model: PJ-B461P

Version number: V6K

46-inch video wall 1.7mm

Product pictures




Product size

1020\*574\*136 l \* w \* t (mm)

Application Pictures



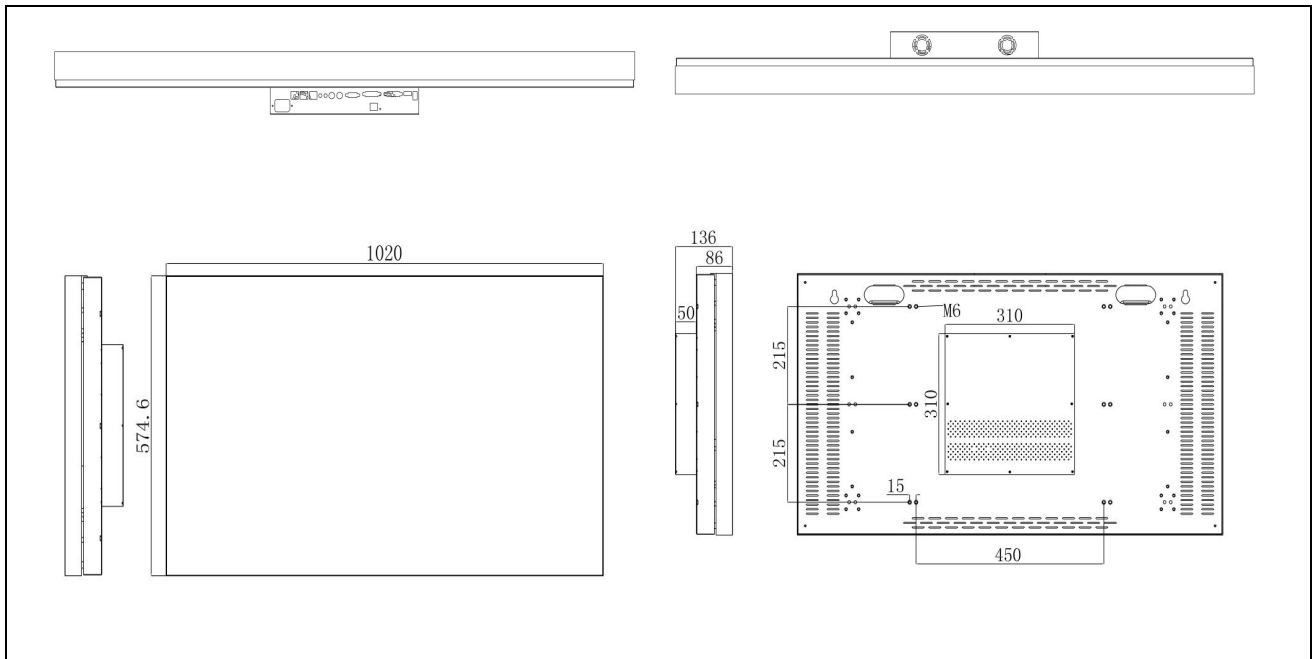

<p><b>Product characteristics</b></p>	<p>Dual-channel Dvi high-definition video switching, multiple high-definition video interface, compatibility;          The first combination of wireless control technology, multi-user operation design, to meet the control of large screen multi-terminal;          Support for USB playback function, support for audio, video, pictures, but also as a machine motherboard upgrade;          Led Bright Back Light, 3d digital noise reduction, HD high resolution, progressive scanning, software to improve contrast;          Automatically Adjust backlight brightness and refresh frequency, new color restore, automatically adjust color saturation</p>	
<p><b>Product name</b></p>	<p><b>Specification parameter</b></p>	
<p><b>Display</b></p>	<p>LCD: 46 Inch          Resolution: 1920*1080          Display Area: 1018*572          contrast: 3500:1          brightness: 500 CDM2          Angle: Horizontal / Vertical: 178</p>	<p>TFT SCREEN RATIO: 16:9          Point Distance: 0.530 * 0.530          Response Time: 6ms</p>
<p><b>Screen brand</b></p>	<p><b>SAMAUNG</b></p>	
<p><b>Main board plan</b></p>	<p>MOTHERBOARD: CS59Y          SYSTEM: None</p>	
<p><b>Interface</b></p>	<p>The diagram shows a series of icons representing different interfaces: USB, HDMI, DVI IN, TCP/IP, DVI IN, VGA IN, AV IN, AV OUT, AUDIO IN, AUDIO OUT, RS232-IN, RS232-OUT, IR, and AC100-240V.</p>	
<p><b>parts</b></p>	<p>Manual, remote control, warranty card, certificate of conformity, power cord</p>	
<p><b>product mix</b></p>	<p>Product architecture</p>	<p>Hardware Iron Plate + Paint Process</p>
	<p>Installation mode</p>	<p>Cabinet type, Horizontal Wall, Hoisting type</p>
	<p>Protective glass</p>	<p>None</p>

	weight	28kg
	Product size	1020*574*136 (mm)
	Packing dimensions	1170*720*440 (mm)
<b>Working parameters</b>	SPLICE assembly	Any line X any column
	Input Signal	USB/HDMI/DVI/VGA/AV/AUDIO/RS232/UR
	Control Mode	RS232/TCP/IP/Remote control
	Joint Joint	1.7MM
	work environment	Operating temperature: 0 ° C to + 60 ° c operating humidity: 10% to 90%
	Power Supply	AC110~240V 60HZ
	power	125W