

**Asianda®**

Shenzhen Yaxunda LCD Display Equipment Co., Ltd

Model: YXD43L

Version number: CH8

43-inch Digital Window Display

Product pictures




Product size

965\*553\*50 1\* w \* t (mm)

Application Pictures



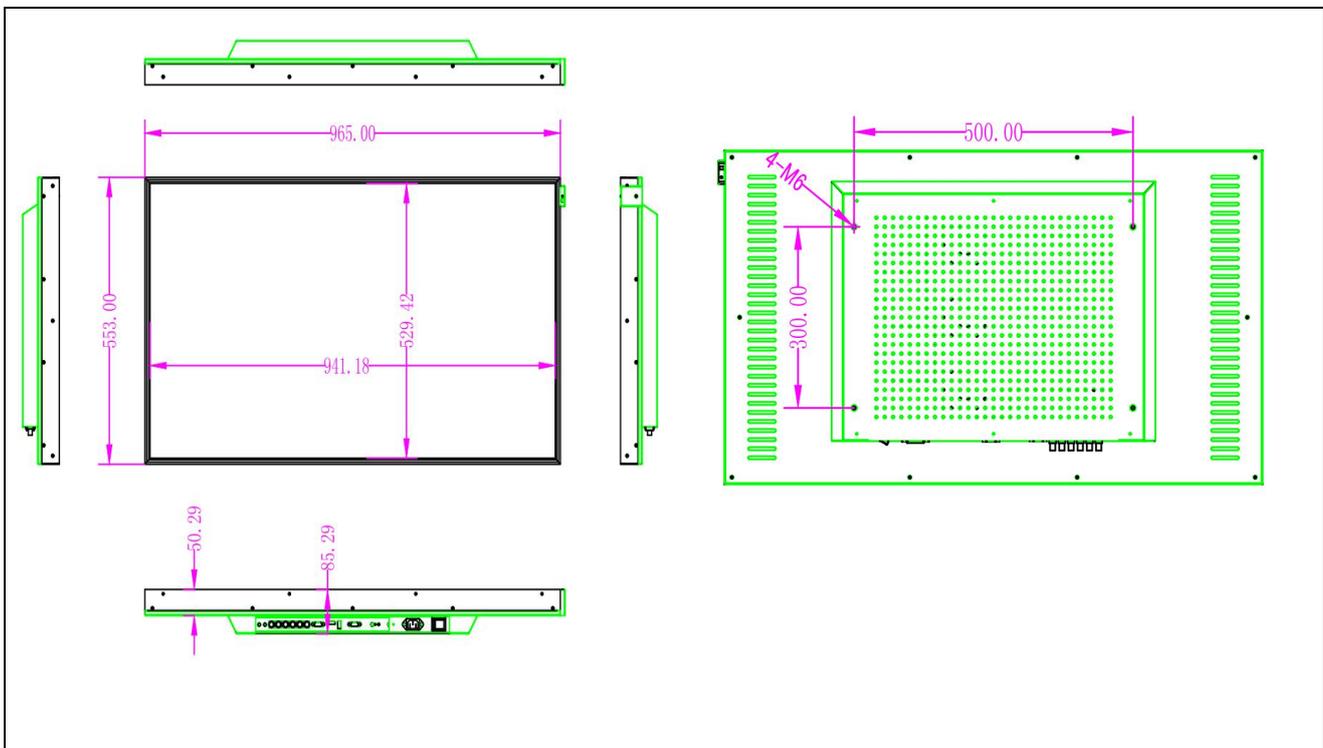

**Product characteristics**

Support 4K input, point 41920 splicing screen 3840x2160, you can achieve point-to-point display, display screen without compression stretch, display more clear and realistic;  
 Dp-loop support, any input signal can pass through the dp-output loop to the next screen of the dp-input,  
 Input Signal to support 90 degrees, 180 degrees, 270 degrees rollover, excellent rollover ;  
 Support Machine Code (address code) , row and column address can be seen, fill in control software, no longer, do not have to calculate binary and trouble;  
 Support for 1080PLVDS output and v-by-one4K output;  
 Automatic signal detection function, when detected a signal input, will automatically switch to the signal source;  
 Support Open all the way signal (signal can support up to 4K);  
 MHL support all the way function, MHL feature phones, tablets can be directly synchronized to the big screen, and the screen can be trimmed to remove black edge operation

Product name	Specification parameter
--------------	-------------------------

<b>Display</b>	LCD: 43 Inch Resolution:1920*1080 Display Area: 940×529 contrast: 3000:1 brightness: 3000 cd/m <sup>2</sup> Angle: Horizontal / Vertical: 178 backlight: LED backlight TFT SCREEN RATIO: 16:9 Point Distance: 0.49*0.49 Response Time: 6ms
----------------	---

<b>Main board plan</b>	Motherboard: rk3288 quad core main frequency 2.0GHz 2GB Built in storage: EMMC 8g (expandable 64g) system: Android 6.0 memory: operating
------------------------	---

<b>Interface</b>	
------------------	--

<b>parts</b>	Manual, remote control, warranty card, certificate of conformity, power cord	
<b>product mix</b>	Product architecture	Hardware Iron Plate + Paint Process + Aluminium Alloy frame
	Installation mode	Horizontal Wall
	Protective glass	None
	weight	20kg
	Product size	965*553*50 (mm)
	Packing dimensions	1085*675*260 (mm)
<b>Working parameters</b>	Brightness control	None
	temperature control	None
	Remote monitoring	None
	Remote monitoringWaterproof requirement	None
	work environment	Operating temperature: 0 ° C to + 45 ° c operating humidity: 5% to 90%
	Power Supply	AC110~240V 60HZ
	power	320W