
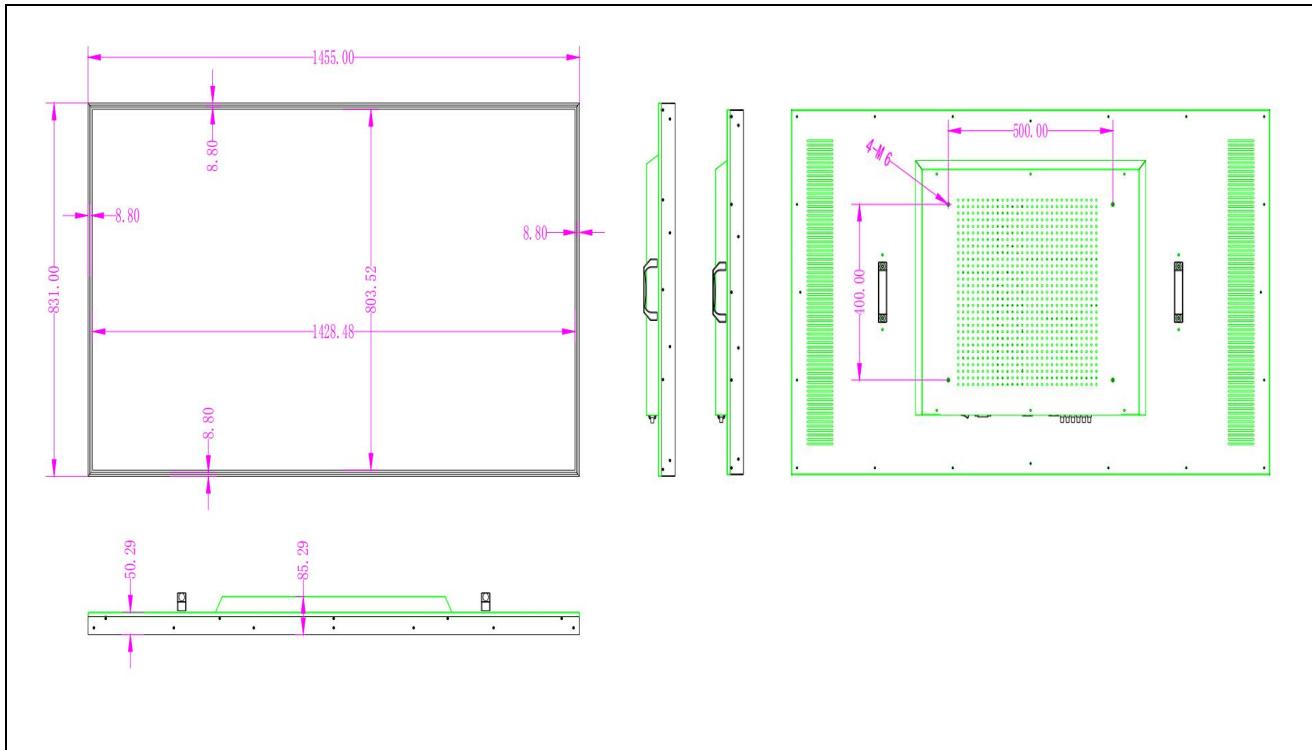


Asianda®	Shenzhen Yaxunda LCD Display Equipment Co., Ltd
Model: YXD65L-30	Version number:
65-inch Digital Window Display	
Product pictures	 
Product size	1455*831*50 l * w * t (mm)
Aplication Pictures	



Product characteristics	<p>Support 4K input, point 41920 splicing screen 3840x2160, you can achieve point-to-point display, display screen without compression stretch, display more clear and realistic;</p> <p>Dp-loop support, any input signal can pass through the dp-output loop to the next screen of the dp-input,</p> <p>Input Signal to support 90 degrees, 180 degrees, 270 degrees rollover, excellent rollover ;</p> <p>Support Machine Code (address code) , row and column address can be seen, fill in control software, no longer, do not have to calculate binary and trouble;</p> <p>Support for 1080PLVDS output and v-by-one4K output;</p> <p>Automatic signal detection function, when detected a signal input, will automatically switch to the signal source;</p> <p>Support Open all the way signal (signal can support up to 4K) ;</p> <p>MHL support all the way function, MHL feature phones, tablets can be directly synchronized to the big screen, and the screen can be trimmed to remove black edge operation</p>
Product name	Specification parameter
Display	<p>LCD: 65 inch TFT screen resolution: 1920 * 1080 display area: 1428 × 803 contrast: 5000:1 brightness: 3000cd / m² Angle: Horizontal / Vertical: 178° backlight: LED backlight</p> <p>Screen scale: 16:9 Dot pitch: 0.12 * 0.36 Response time: 8ms</p>
Main board plan	<p>Motherboard: rk3288 quad core main frequency 2.0GHz 2GB Built in storage: EMMC 8g (expandable 64g) system: Android 6.0</p> <p>memory: operating</p>

Interface	
parts	Manual, remote control, warranty card, certificate of conformity, power cord
product mix	Product architecture Hardware Iron Plate + Paint Process + Aluminium Alloy frame
	Installation mode Horizontal Wall
	Protective glass None
	weight 35kg
	Product size 1455*831*50 (mm)
	Packing dimensions 1610*990*250 (mm)
Working parameters	Brightness control None
	temperature control None
	Remote monitoring None
	Remote monitoring Waterproof requirement None
	work environment Operating temperature: 0 ° C to + 45 ° c operating humidity: 5% to 90%
	Power Supply AC110~240V 60HZ
	power 450W