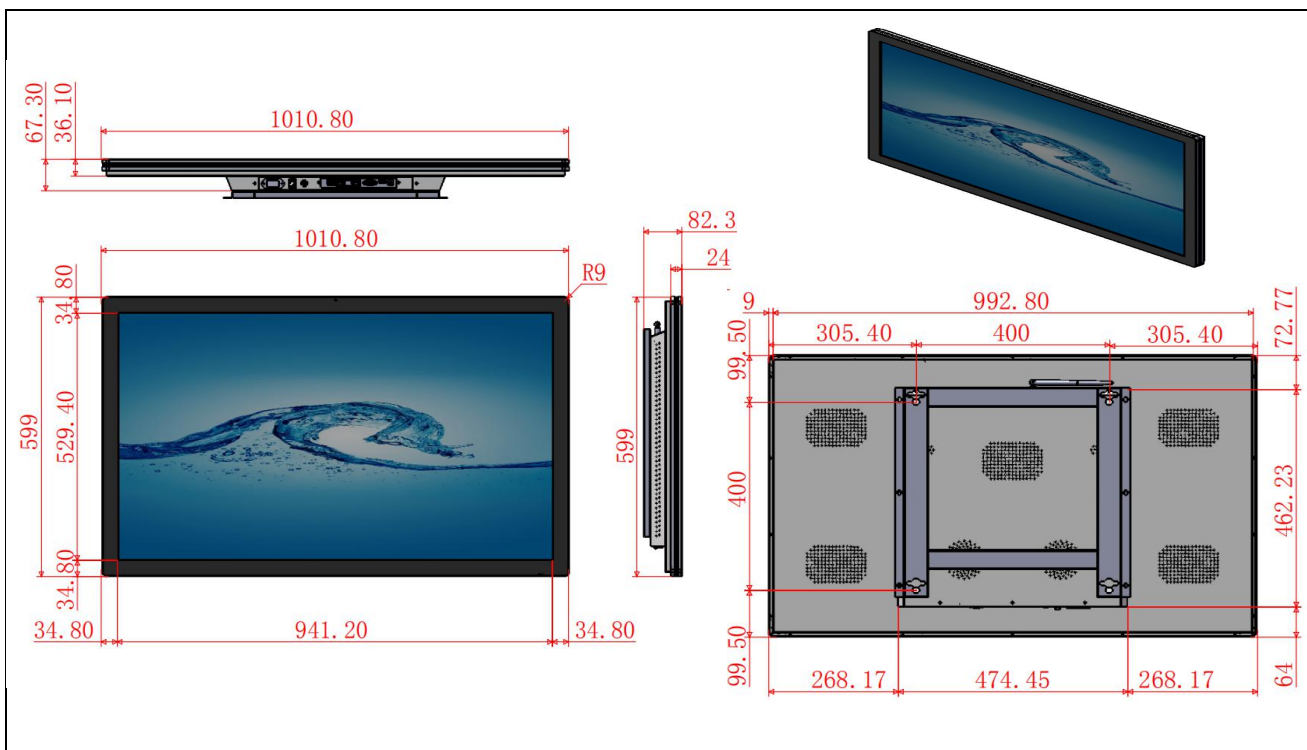


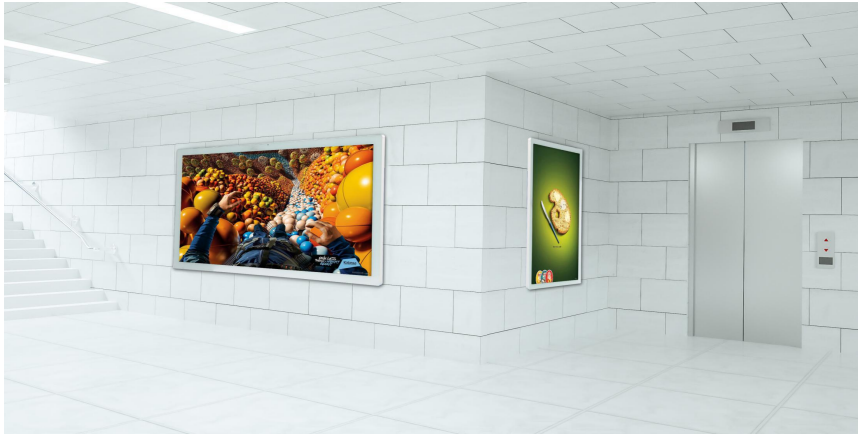


<b>Asianda®</b>	Shenzhen Yaxunda LCD Display Equipment Co., Ltd
<b>Model No. : YXD43L</b>	<b>version no. : WA8</b>
<b>Quote (RMB)</b>	prototype:            50pcs:            100pcs:
<b>Date</b>	<b>Note: This offer is one year with tax and freight not included</b>
<b>43-inch wall mounted advertising machine</b>	
<b>Product Image</b>	
<b>Product size</b>	<b>599*73*1010 Wide * Thick * Long (mm)</b>
<b>Aplication Pictures</b>	




<p><b>Product characteristics</b></p>	<p>3d digital filter noise reduction, line-by-line scanning, the screen is true and delicate;  Smart screen protection function, prevent Burns;  Various high definition signal interface, strong compatibility;  Intelligent backlight brightness control, improve the visual effect of image, save energy and save electricity;  The intelligent temperature control cooling / heating system ensures the machine to work stably in the best environment.</p>
<p><b>Playback system</b></p>	<p>Each playing area can be arranged and layered freely, and can be played on horizontal and vertical screens;  Screen Area Free Segmentation, composable picture, audio, video, web page, clock, date, caption, mixed material editing;  Support Program and broadcast table preview, real-time monitoring playback screen, multi-stage timing switch settings, automatic reset;  Different users can set different permissions;  Adopt distributed management, support remote or local control;  Support android phone or tablet terminal to play a list of programs, remote monitoring, timing switch function;  Screen brightness can be adjusted automatically according to the surrounding environment;  Supports a variety of general audio / Video, and office documents;  Support cable, Wifi, 4G network.</p>
<p><b>Product name</b></p>	<p><b>Specification parameter</b></p>
<p><b>Display screen</b></p>	<p>LCD SCREEN: 43 Inch TFT  Resolution: 1920 * 1080  Display Area: 940*529  contrast: 3000:1  brightness: 400 CDM2</p> <p>SCREEN SCALE: 16:9  point distance: 0.49 * 0.49  Response Time: 8ms</p>
<p><b>Motherboard scheme</b></p>	<p>MOTHERBOARD: RK3288 quad-core, 2.0  Ram: 2 GB  BUILT-IN STORAGE: EMMC 8G expandable 64G  system: Android6.0</p> <p>Ghz  operating</p>

<p><b>Android interface</b></p>	 <p>POWER    DC 12V    AUDIO    USB    OTG    USB    TF/SIM    RJ45    UBOOT</p>	
<p><b>Accessories</b></p>	<p>Manual, remote control, warranty card, certificate of conformity, Power Cord</p>	
<p><b>Product structure</b></p>	<p>Product architect</p>	<p>Hardware shell + lacquer process + aluminum alloy border</p>
	<p>Installation mode</p>	<p>Wall mounted type</p>
	<p>Protective Glass</p>	<p>4 mm tempered glass</p>
	<p>Weight</p>	<p>36kg</p>
	<p>Product size</p>	<p>599*73*1010 (mm)</p>
	<p>Packing size</p>	<p>679*153*1090 (mm)</p>
<p><b>Operating parameter</b></p>	<p>Brightness Control</p>	
	<p>Temperature</p>	
	<p>Working Environment</p>	<p>Working Temperature: 0 ° C to + 50 ° C working humidity: 5% to 90%</p>
	<p>Power supply</p>	<p>AC110~240V 60HZ</p>
	<p>Power</p>	<p>65W</p>

<p><b>Asianda®</b></p>	<p>Shenzhen Yaxunda LCD Display Equipment Co., Ltd</p>
<p>Model No. : YXD43L</p>	<p>version no. : WA8</p>
<p>Quote (RMB)</p>	<p>prototype:            50pcs:            100pcs:</p>
<p>Date</p>	<p>Note: This offer is one year with tax and freight not included</p>
<p><b>43-inch Wall Mounted Advertising machine-capacitive touch</b></p>	
<p>Product Image</p>	
<p>Product size</p>	<p>599*73*1010    Wide * Thick * Long (mm)</p>
<p>Application Pictures</p>	



<b>Motherboard scheme</b>	MOTHERBOARD: RK3288 quad-core, 2.0 Ghz Ram: 2 GB BUILT-IN STORAGE: EMMC 8G expandable 64G operating system: Android6.0	
<b>Android interface</b>		
<b>Accessories</b>	Manual, remote control, warranty card, certificate of conformity, Power Cord	
<b>Product structure</b>	Product architecture	Hardware shell + lacquer process + aluminum alloy border
	Installation mode	Wall mounted type
	Protective Glass	4 mm tempered glass
	Weight	36kg
	Product size	599*73*1010 (mm)
	Packing size	679*153*1090 (mm)
<b>Operating parameter</b>	Brightness Control	
	Temperature	
	Working Environment	Working Temperature: 0 ° C to + 50 ° C working humidity: 5% to 90%
	Power supply	AC110~240V 60HZ
	Power	65W