
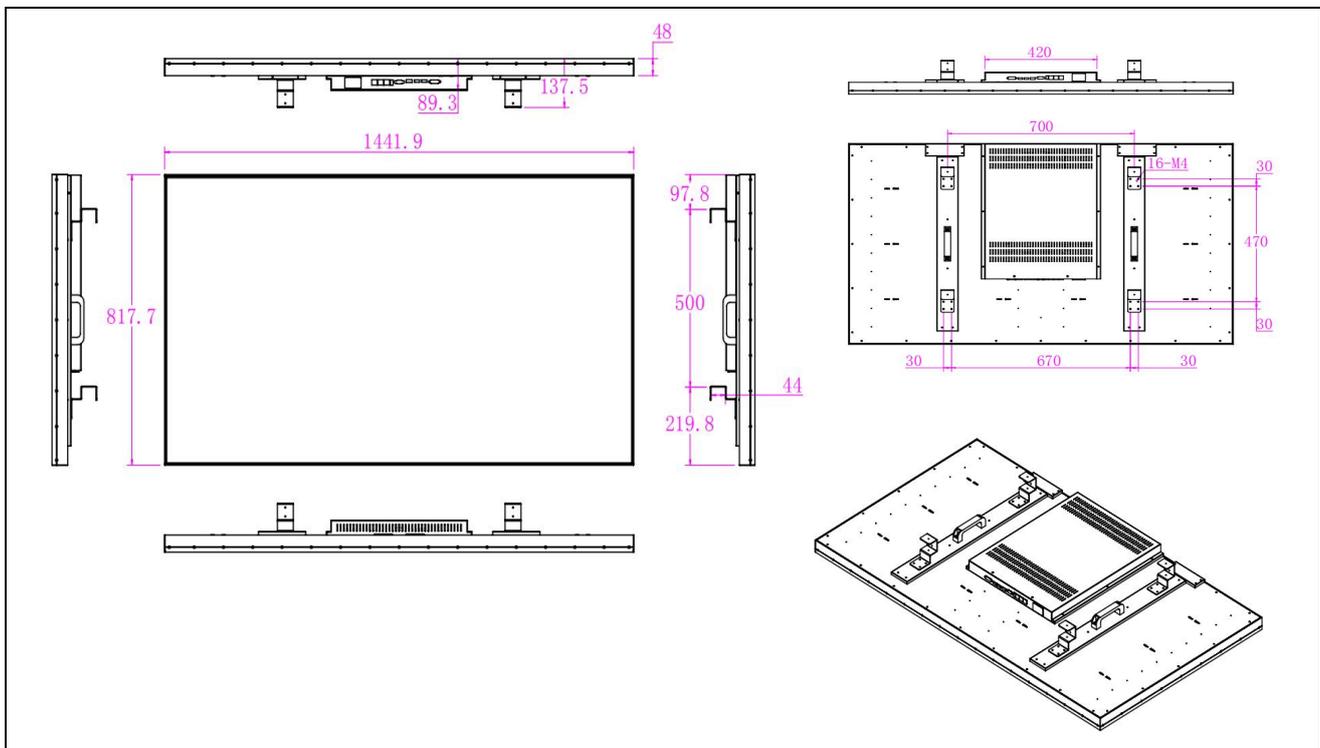


<p><b>Asianda®</b></p>	<p>Shenzhen Yaxunda LCD Display Equipment Co., Ltd</p>
<p>Model: YXD65L-10</p>	<p>Version number: 3288</p>
<p><b>65-inch horizontal ultra-Narrow Display</b></p>	
<p>Product pictures</p>	
<p>Product size</p>	<p>1441*817*89 l * w * t (mm)</p>
<p>Application Pictures</p>	



<p><b>Product characteristics</b></p>	<p>3D digital filtering and noise reduction, progressive scanning, real and delicate picture;          Intelligent screen protection function, anti burn;          Multiple HD signal interfaces, strong compatibility;          Intelligent backlight brightness control, improve the visual effect of the image, save energy and power.          Intelligent temperature control and heat dissipation / heating system ensures stable operation of the machine in the best environment.</p>
<p><b>Broadcasting system</b></p>	<p>Each playing area can be arranged and layered freely, and can be played horizontally and vertically.          The screen area can be divided freely, and pictures, audio, video, webpage, clock, date, subtitle, mixed material editing can be combined.          It supports program and playlist preview, real-time monitoring of playing picture, multi-stage timing on / off setting, and automatic reset.          Different users can set different operation permissions.          Adopt distributed management, support remote or local control.          It supports Android mobile phone or tablet end-to-end broadcast terminal to send program list, remote monitoring and timing on-off function.          The brightness of the screen is automatically adjusted according to the surrounding environment.          Support all kinds of regular audio / video, and office documents.          Support wired, WiFi, RJ45, 4G networks.</p>
<p><b>Product name</b></p>	<p><b>Specification parameter</b></p>
<p><b>Display</b></p>	<p>LCD: 65 inch TFT screen          Screen scale: 16:9 resolution: 3840 * 2160          display area: 1428 × 803          Dot pitch: 0.12 * 0.36 contrast: 5000:1          brightness: 500cd / m2          Response time: 8ms visual angle: horizontal / vertical: 178 °</p>
<p><b>Main board plan</b></p>	<p>Motherboard: rk3288 quad core main frequency 2.0GHz memory:          2GB          Built in storage: EMMC 8g (expandable 64g) operating          system: Android 6.0</p>

Interface		
parts	Manual, remote control, warranty card, certificate of conformity, power cord	
product mix	Product architecture	Hardware Iron Plate + Paint Process + Aluminium Alloy frame
	Installation mode	Horizontal Wall
	Protective glass	None
	weight	78.7kg
	Product size	1441*817*89 (mm)
	Packing dimensions	1610*990*250 (mm)
Working parameters	Brightness control	None
	temperature control	None
	Remote monitoring	None
	Remote monitoringWaterproof requirement	None
	work environment	Operating temperature: 0 ° C to + 45 ° c operating humidity: 5% to 90%
	Power Supply	AC110~240V 60HZ
	power	150W