

Asianda[®]

Shenzhen Yaxunda LCD Display Equipment Co., Ltd

Model no: YXD32L-AD

version no:

32-inch Hand Sanitizer Digital Display

Product Image




Product size

1344*493*132 L * W * T (mm)

Aplication Pictures



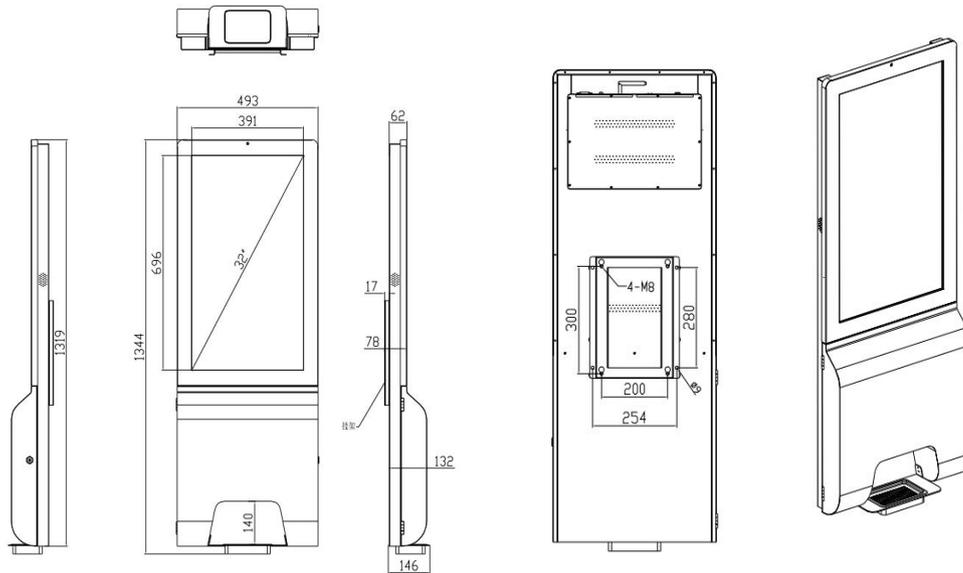

<p>Product characteristics</p>	<p>3d digital filter noise reduction, line-by-line scanning, the screen is true and delicate; Smart screen protection function, prevent Burns; Various high definition signal interface, strong compatibility; Intelligent backlight brightness control, improve the visual effect of image, save energy and save electricity; The intelligent temperature control cooling / heating system ensures the machine to work stably in the best environment.</p>
<p>Playback system</p>	<p>Each playing area can be arranged and layered freely, and can be played on horizontal and vertical screens; Screen Area Free Segmentation, composable picture, audio, video, web page, clock, date, caption, mixed material editing; Support Program and broadcast table preview, real-time monitoring playback screen, multi-stage timing switch settings, automatic reset; Different users can set different permissions; Adopt distributed management, support remote or local control; Support android phone or tablet terminal to play a list of programs, remote monitoring, timing switch function; Screen brightness can be adjusted automatically according to the surrounding environment; Supports a variety of general audio / Video, and office documents; Support cable, Wifi, 4G network.</p>
<p>Display screen</p>	<p>LCD SCREEN: 32 Inch TFT screen ratio: 16:9 Resolution: 1920 * 1080 Display Area: 698*392 Dots Distance: 0.12 * 0.36 contrast: 3000:1 brightness: 350 cd/m² response time: 8ms Angle: Horizontal / Vertical: 178 backlight: LED backlight</p>
<p>Dispenser</p>	<p>Foam / Spray / emulsion, single foaming capacity: 1-1.2 ML, capacity: 3000 ml induction distance (CM) : 8-12, working voltage: DC6V1A</p>

Motherboard scheme	MOTHERBOARD: RK3288 quad-core, 2.0 Ghz Ram: 2 GB BUILT-IN STORAGE: EMMC 8G expandable 64G operating system: Android6.0 Nano-scale moisture-proof treatment	
Android interface		
Accessories	Manual, remote control, warranty card, certificate of conformity, Power Cord	
Product structure	Product architecture	Hardware shell + lacquer process
	Installation mode	Wall mounted / Vertical Machine
	Protective Glass	4 mm toughened glass
	Weight	26kg
	Product size	1344*493*132 (mm)
	Packing size	1441*575*215 (mm)
Operating parameter	Brightness Control	
	Temperature	
	Working Environment	Working Temperature: 0 ° C to + 50 ° C working humidity: 5% to 90%
	Power supply	AC110~240V 60HZ
	Power	55W