

Asianda®

Shenzhen Yaxunda LCD Equipment Co. , Ltd.

Model number: F8-BW

Version number:

8-inch face recognition smart access control unit

Product
Image



Product size

238*128*28 L*W*T (mm)

Aplication
Pictures

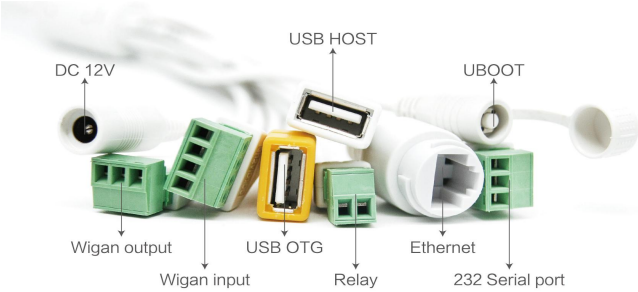




Product characteristics

3d digital filtering noise reduction, line-by-line scanning, the screen real fine;
 Smart Screen Protection Function, Prevent Burns;
 High stability, low energy saving: High Performance, low power DSP processor, stable operation;
 Support ID card, residence card, IC card card to open the door in a variety of ways;
 Support face recognition (live verification) , 3000 picture unit, unlimited number of wall machine;
 Support personalized fixed Password, dynamic password, visitor password and other password open way;
 Support Remote Cell Phone Door, call cell phone door, call room number door, call property management office door;
 Support Visual Intercom, voice intercom (using highly sensitive noise reduction chip) can support visitors to take pictures, support strangers to capture, blacklist comparison
 Large Screen Advertising, long-distance updating of advertising content, support for interactive advertising, even-screen advertising, support for property fees collection, support for multi-point, point-to-point mass notification, support for property warranty and other functions, support for external monitoring cameras, data Upload in real time

| Product name | Specification parameter |
|----------------------|---|
| Display screen | LCD SCREEN: 8.0 inch IPS LCD screen screen ratio: 10:16 Resolution:800*1280 Display Area:172×107 point distance: 0.13*0.13 contrast:800:1 |
| Cameras | 200 W,Binocular Wide Motion Camera,Led and infrared dual fill lamp |
| Two-dimensional code | Automatic induction, continuous reading, command trigger |

| | | |
|----------------------------|---|---|
| Temperature module | Thermal field of view 32 x 32 dot array, infrared induction, temperature over alarm | |
| Motherboard scheme | CPU: RK3288 memory: 2GB Built in storage: EMMC 8g operating system: Android6.0 | |
| Interface |  | |
| Accessories | Manuals, warranty cards, certificates of conformity, adapters | |
| Product structure | Product architect | Hardware shell + lacquer process + aluminum alloy border |
| | Installation mode | Wall mounted type+Vertical machine |
| | Protective Glass | 2mm toughened glass |
| | Weight | 2kg |
| | Product size | 238*128*28 (mm) |
| | Packing size | 440*200*50 (mm) |
| Operating parameter | Brightness Control | |
| | Temperature | |
| | Working Environment | Working Temperature:-15C to + 65 c working humidity: 20% to 95% |
| | Power supply | Dc12v wide voltage input |
| | Power | 15W |

|

|