


YXD27P-WZDT

Touchless self payment kiosk

1. PCAP touch screen
2. 27inch FHD screen
3. Thermal printer- easy to change paper
4. QR code scanner
5. POS /NFC to option
6. Anti-peeping mirror
7. Android / Windows 10 to option

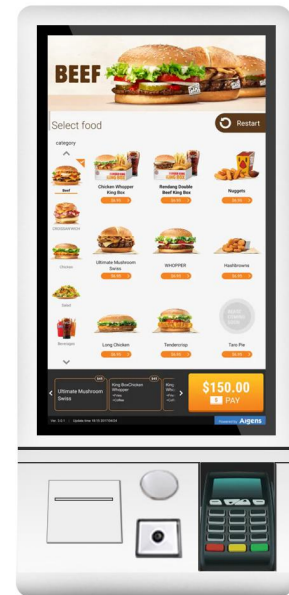

| Panel Specifications | | | |
|-----------------------------------------|-----------------------------------------------------------------------------------------|-----------------|---------------------------------------|
| LCD Size | 27inch | Area | 521.28*293.22 mm |
| Resolution | 1920*1080 | View Angle | 178/178/178/178 |
| Display Ratio | 9:16 | Response Time | 6ms |
| Brightness (nits) | 250cd/m2 | Life (hrs) | 50000 |
| Contrast | 1000:1 | Power Input | AC 100-240V |
| Input ports | | | |
| USB 2.0 | x2 | SD | x1 |
| LAN | X1 | SIM card reader | X1 (for 4G use) |
| Operate system's of kiosk specification | | | |
| Operate System | Android 5.1/7.1 | RAM | 2GB |
| CPU | Rockchip RK3288 quad-core ARM Cortex-A17 | ROM | 8GB |
| Supported Media formats | | | |
| Video | MPEG1/MPEG2/MPEG4/AVI/VOB/MOV/WMV/DIVX/RM/RMVB, support super HD 2160P video | | |
| Image | JPG/JPEG/PNG/BMP | | |
| Audio | MP3/WMA/AAC etc | | |
| Scrolling text | TXT/WORD/EXCEL/PDF | | |
| Functions | | | |
| Rolling subtitles | Display the subtitles at the bottom of screen with the video and picture | Software Update | Software update |
| Power Memory | Support program replaying from the setting time before the power failure | Display Mode | Support Portrait display mode |
| Split Screen | Support 1080p video, 1080p picture, picture, video and subtitles split-screen function. | Play mode | Repeat all, single repeat, order play |
| Anti-peeping | Yes | Print paper | Yes |

| | | | |
|-----------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| Scan code | Yes, bar code & QR code | Option support | NFC/ POS machine |
| Thermal printer | | | |
| Printing method | Line thermal printing | Resolution | 203dpi |
| Printing speed | 100mm/s (max) | Cut way | Full cut/half cut |
| Printing width | 384dots/line (48mm) | Printing length | 100KM |
| Paper width/thickness | 58 ± 0.5 mm / 56~105µm | Cutter life | 1 million times |
| The maximum diameter of the paper roll | <= 50mm | character | FONT A 12*24 points FONT B 9*17 points GB18030 Simplified Chinese 24*24 points GB2312 Simplified Chinese 16*16 points |
| Loading way | Easy paper loading | Environmental | operating temperature -10~50°C (no condensation) Operating humidity 20%~85%RH (85%RH at 40°C) |
| QR code scanner | | | |
| Trigger mode | automatic induction, continuous reading, command trigger | Parameter setting method | Scan QR code to set parameters or host command settings |
| Prompt method | Connect buzzer, LED indicator | Scan angle | Inclination angle ±55°, rotation 360° |
| Decoding type (bar code) | UPC-A, UPC-E, EAN-13, ISBN10, ISBN13, EAN-8, CODE39, CODE 11, CODE 93, CODE128 INTERLEAVED25, INDUSTRIAL25, MATRIX25, S25, CODE 32, TRIOPTIC39, GS1_128, CODABAR, MSI, China postal code, TELEDEN, RSS, GS1_DATABAR, GS1_DATABAR_LIM, GS1_DATABAR_EXP; | Decoding type (QR code) | QR, MICROQR, PDF417,, Data Matrix |
| Minimum resolution | 7mil, 1mil = 0.0254mm 5mil, 1mil = 0.0254mm | Reading distance QR | 4 cm~ 20cm |
| Working temperature | -30~60°C | Humidity | 5%~95% (no condensation) |
| Option | | | |
| NFC | Yes | POS machine | Yes |
| Floor stand | Yes | Adjust high | 0.7-1.33meters |
| VESA Support | 75*75, 100*100/200/100, 150*100, 100*200, 200*200 | Package dimension | 90*35*10cm |
| Max support weight | 35kgs | Package G.W. | 12KGS |

