

# YXD65S-WC

Outdoor Waterproof

Wall mount

LCD advertising display



#### Trade Condition

**Model No.** YXD65S-WC

#### Panel Specification

**Panel Size** 65"(16:9)

**Resolution** 3840\*2160

**Pixel Pitch** 0.42975x0.42975

# Shenzhen Yaxunda LCD Display Equipment Co.,Ltd

<b>Contrast ratio</b>	5000:1
<b>Active area</b>	1428*803
<b>Brightness</b>	2000cd/m2
<b>Viewing angle</b>	89/89/89/89
<b>Android Specification</b>	
<b>Operating System</b>	Android
<b>CPU</b>	<b>Android RK3288, 4-core</b>
<b>Memory</b>	<b>2GB</b>
<b>Nand flash</b>	<b>8GB</b>
<b>Storage port</b>	USB, SD card, SATA port hard disk storage
<b>OS</b>	Android 5.1
<b>WiFi</b>	Yes, inbuild WiFi(802.11b/g/n); 3G/GPS/Bluetooth(optional)
<b>Output</b>	HDMI, LVDS
<b>Other ports</b>	USB x 2, SD x 1, RJ45 x 1, HDMI out x 1,Audio out x 1
<b>Speaker</b>	yes
<b>System function</b>	
<b>Support video</b>	MPEG1/MPEG2/MPEG4/AVI/VOB/MOV/WMV/DIVX/RM/RMVB, support super HD 2160P video
<b>Support picture</b>	JPG/JPEG/PNG/BMP
<b>Support Flash</b>	Flash 11, SWF/FLV/F4V
<b>Support TXT</b>	TXT/WORD/EXCEL/PDF
<b>Support Website</b>	HTML/ASP/JSP/PHP
<b>Support RSS</b>	Internet RSS title and text, flip over/page turning
<b>Long-distance control</b>	monitoring the terminal display image in real time
<b>Long-distance wake up</b>	Wake up the off terminal end by the current network
<b>Timer</b>	Set time on/off auto
<b>Image rotate</b>	support 90°,180°,270° image rotate
<b>Display zone</b>	Support more than 30 individual display zones
<b>Software upgrade</b>	Support upgrade software by LAN or SD card
<b>Environment</b>	
<b>Operation temperature</b>	-20 +55℃ ( no condensation)
<b>operation humidity</b>	5%-90% ( no condensation)
<b>Detailed</b>	
<b>Shell</b>	Sheet metal shell with 1.5mm SGCC galvanized steel, the inner coating of zinc-rich powder coating, surface spray DuPont outdoor plastic powder protection, the useful life is 10 years.
<b>Tempered Explosion-proof Glass</b>	6mmAR anti-reflective glass, imported glass original film, AR anti-glare coating; Light transmittance of 97%, reflectance of 3%; Isolation of 99% of the sun's ultraviolet rays, 52% solar heat isolation;

# Shenzhen Yaxunda LCD Display Equipment Co.,Ltd

<b>LCD panel</b>	Outdoor special highlight LCD screen; LED direct type backlight, brightness 2000cd / m2, the sun readable; Screen resolution HD 3840*2160; Automatic sensor, according to the ambient light to adjust the screen brightness, energy saving, reduce light pollution;
<b>Electronic control system</b>	Leakage protection switch, leakage protection, overvoltage protection; Microcomputer timer switch, sub-time control of the machine start and stop hours; Lightning protection, lightning protection level C-class, to prevent lightning induction instantaneous; Ming Wei, Taiwan's industrial-grade power supply, power supply is stable and reliable;
<b>Temperature control system</b>	Smart fan integrated temperature control, charged heating, to meet the -20- +55 degrees outdoor environment, the display is not black, the whole machine work; Adopt imported centrifugal / axial fan, supporting fan speed board, automatic temperature, automatically adjust the fan speed, energy saving, extended fan life; Efficient multi-layer filtration system, isolated harmful dust into the machine, the whole degree of protection to IP55;
<b>Has completed the test</b>	Spray waterproof test; High and low temperature test; Solar radiation test Machine aging test;

## Picture

**Hydraulic support**




# Shenzhen Yaxunda LCD Display Equipment Co.,Ltd

Inside structure




Timer

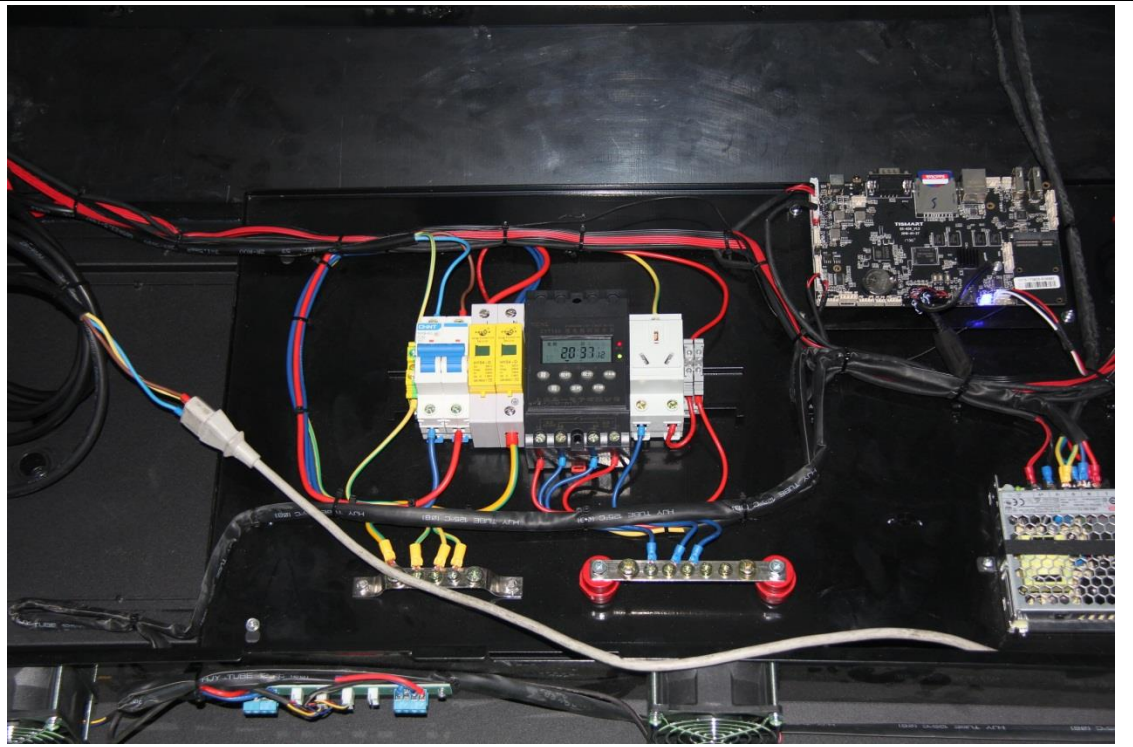

# Shenzhen Yaxunda LCD Display Equipment Co.,Ltd

1. Main board
2. Temperature control board
3. Power board

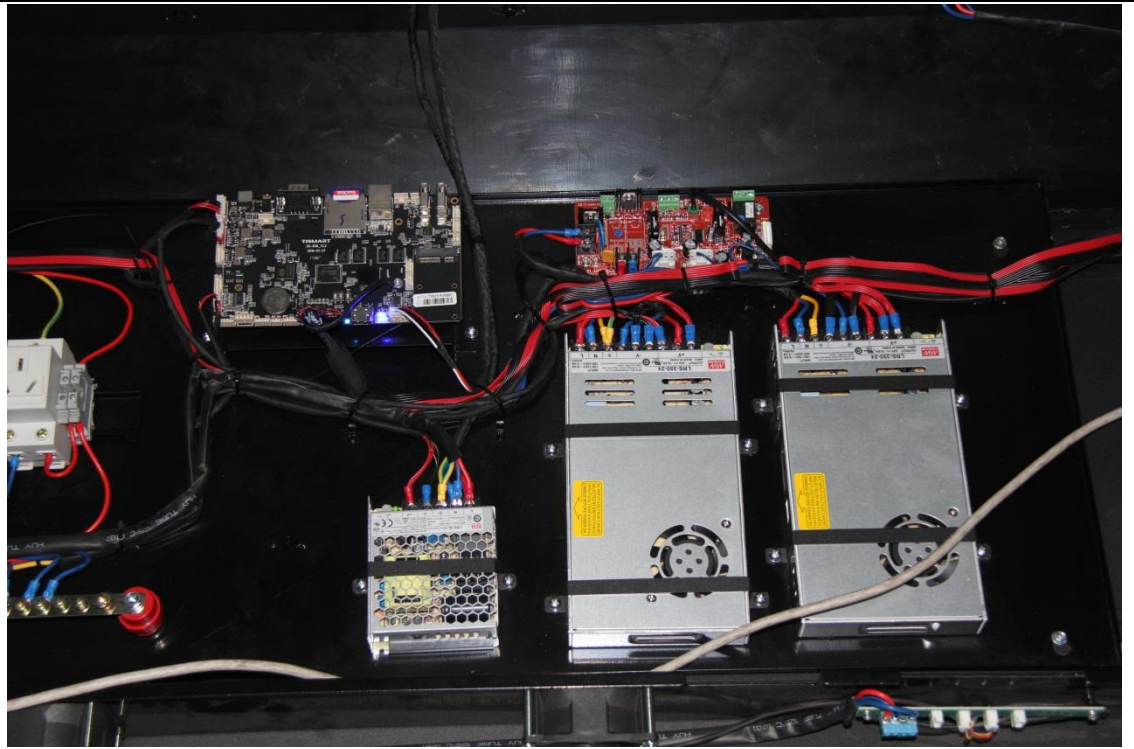

1. Fan
2. Warming system
3. Filter layer
4. Rainwater backflow system

